AD646748
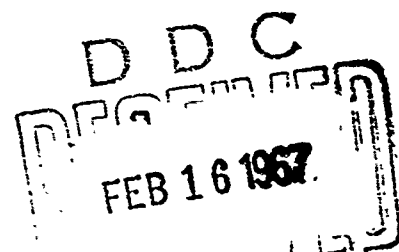
THE NOL BOUNDARY LAYER CHANNEL

# NOL

7 NOVEMBER 1966

## UNITED STATES NAVAL ORDNANCE LABORATORY, WHITE OAK, MARYLAND

NOLTR 66-185

D D C

FEB 16 1967

Distribution of this document is unlimited.

NOLTR 66-185

Aerodynamics Research Report No. 270

## THE NOL BOUNDARY LAYER CHANNEL

by

R. E. Lee, W. J. Yanta, A. C. Leonas
and J. W. Carner

ABSTRACT: A Mach 3 to 7 blow-down wind tunnel facility for investigating boundary layer phenomena in the transitional and turbulent range is described. The facility, referred to as the Boundary Layer Channel, utilizes a flexible plate and a flat plate to form the two opposite walls of a two-dimensional supersonic nozzle. The plate is 8 feet long. The channel operates at supply temperatures up to $1000°F$ and supply pressures from 0.1 to 10 atmospheres. The Reynolds number per foot capability is from $3 \times 10^4$ to $2.4 \times 10^7$.

i

NOLTR 66-185                                          7 November 1966

The NOL Boundary Layer Channel


This report describes the design and performance of NOL's Boundary
Layer Channel which has an operating capability in Mach numbers
from 3 to 7 and in Reynolds number from $3 \times 10^4$ to $2.4 \times 10^7$ per
foot.  This work is part of a continuing program for the investi-
gation of transitional and turbulent boundary layers and their
related effects.

The authors wish to acknowledge the work of Dr. K. R. Enkenhus who
did the aerodynamic design for the Boundary Layer Channel.  They
also extend their gratitude to members of the Wind Tunnel Design and
Operations Division, in particular, the work of Messrs. L. Kaplan
and R. Ogan for their efforts in providing the needed instrumentation
which enabled the shakedown program to be carried out in an expedient
manner.  They also wish to thank Messrs. F. W. Brown and F. C. Kemerer
for the efficient operation of the facility.


                              E. F. SCHREITER
                              Captain, USN
                              Commander


                              K. R. ENKENHUS
                              By direction

## CONTENTS

## ILLUSTRATIONS

## SYMBOLS

| | |
|---|---|
| B | constant used in equation (3) |
| h | nozzle exit height |
| M | Mach number |
| $M_T$ | nozzle exit Mach number |
| $p_e$ | diffuser exit pressure |
| $p_o$ | supply pressure |
| $p_o'$ | Pitot pressure |
| $R_{ct}$ | nozzle throat radius of curvature |
| $Re_\theta$ | Reynolds number based on boundary layer momentum thickness |
| T | temperature |
| $T_{aw}$ | adiabatic wall temperature |
| $T_o$ | supply temperature |
| $T_w$ | wall temperature |
| x | axial coordinate, measured from nozzle throat |
| X | dimensionless axial distance from nozzle throat, x/h |
| $X_T$ | dimensionless distance from nozzle throat to beginning of test rhombus |
| y | coordinate normal to flat plate or axis |
| y* | nozzle throat height |
| y** | diffuser throat height |
| $\gamma$ | ratio of specific heats |
| $\delta$ | boundary layer velocity thickness |
| $\delta$* | boundary layer displacement thickness |
| $\theta$ | boundary layer momentum thickness |

# INTRODUCTION

Many boundary layer studies in recent years have been devoted to the solution of problems associated with re-entry flight at high Reynolds numbers and Mach numbers. Considerable progress has been made in laminar boundary layer studies. This type of boundary layer may be considered well understood if one knows the chemistry and reaction rates and neglects rarefaction effects. Transitional and turbulent boundary layers, on the other hand, are not nearly as well understood. Reliable theoretical descriptions of transitional and turbulent boundary layers are not available at high Mach numbers due to a lack of understanding of the basic physical phenomena. There is also a lack of reliable and complete experimental data. Consequently, to further enhance the understanding of compressible boundary layer flows and to provide experimental data to assist theoretical predictions, the NOL Boundary Layer Channel was designed and fabricated.

NOL's Mach number 3 to 7 Boundary Layer Channel is essentially a continuously operating wind tunnel. The conventional symmetrical supersonic nozzle has been replaced by a nozzle having a flat test plate as one wall, a flexible plate as the other wall, and two slightly diverging side walls. The channel's instrumented flat test plate extends from the subsonic inlet to the supersonic diffuser. A desired distribution of local flow properties along the test plate can be achieved by setting the flexible plate contour. The test plate is 100 inches long and diverges from 12 inches at the nozzle throat to 13.5 inches at the nozzle exit. The channel uses the propane gas fired heater, bottled air supply, and vacuum system used previously by the NOL Hypersonic Tunnel No. 4 and reported in reference (1). The present report describes the facility and its performance at the nominal Mach number 5 nozzle setting.

## MAJOR COMPONENTS OF THE BOUNDARY LAYER CHANNEL

A schematic diagram of the Boundary Layer Channel is shown in figure 1. The facility may be divided into two parts; namely, the supporting equipment and the channel itself. The supporting equipment, which is shared with other wind tunnel facilities at NOL, is described in references (1) and (2); however, a brief description is included herewith. The other part, the channel itself, is comprised of the settling chamber, nozzle, test plate, and variable diffuser. These will be described in detail.
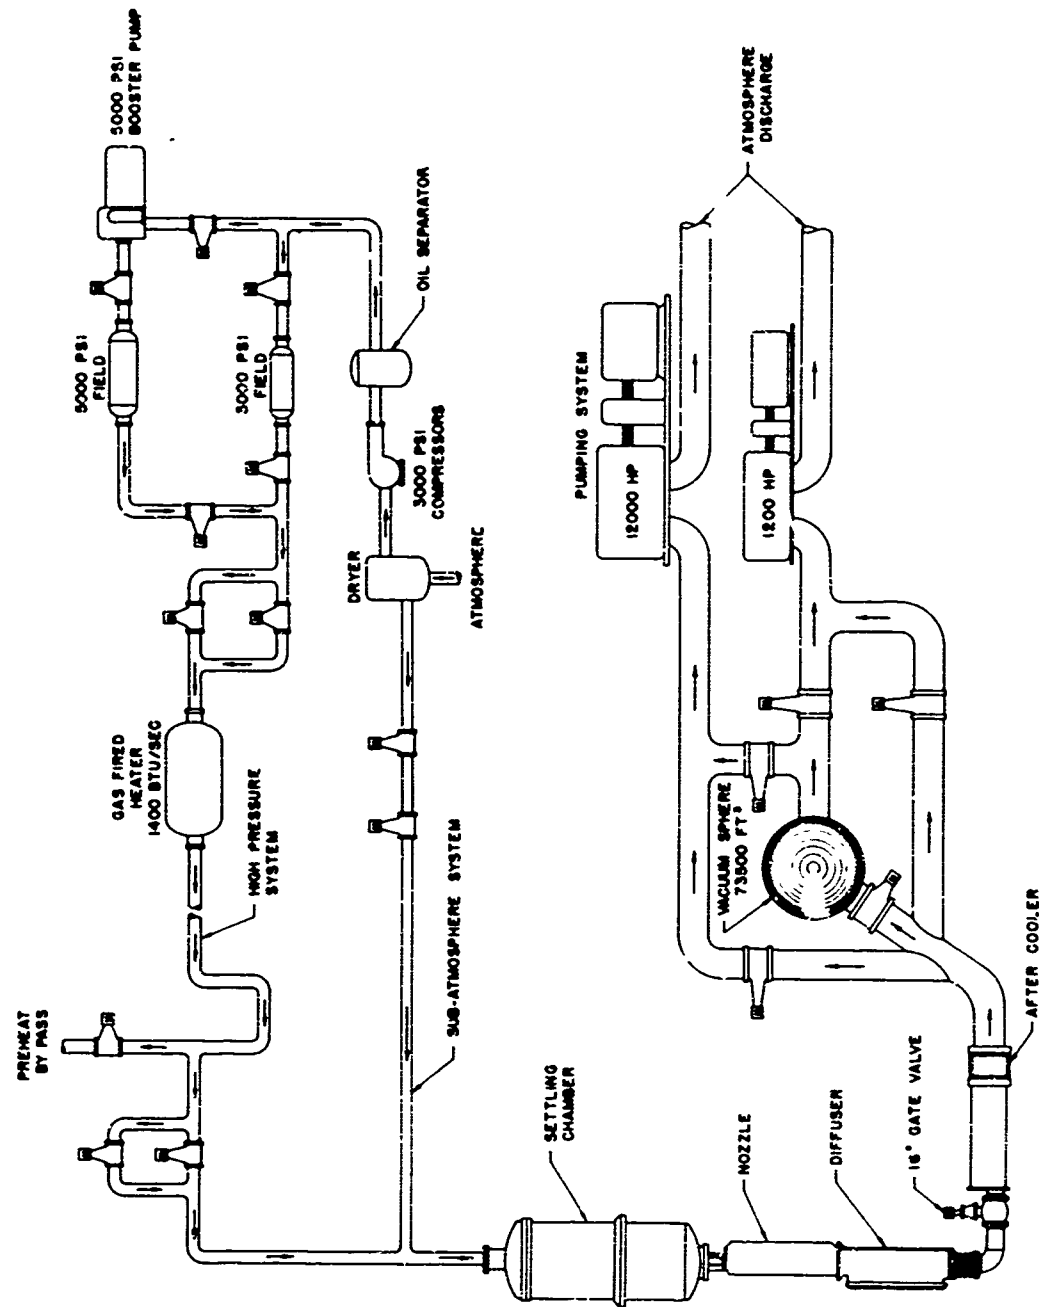
FIG.1 SCHEMATIC DIAGRAM FOR NOL BOUNDARY LAYER CHANNEL

## Supporting Equipment

The supporting equipment consists of the following: air drier, air compressors, air storage, pressure regulators, temperature controllers, exhaust piping, and vacuum pumps.

Air drying is accomplished principally by passing the air through a bed containing an alumina-type desiccant. Further drying is done in the compressor aftercoolers. The dew point can be in the range from $-40°F$ to $-73°F$.

The supply air is compressed by twelve reciprocating compressors which have a combined delivery rate of 2.4 lbs/sec which pressurize a 2300 cubic foot reservoir to 3000 psi. Nine hundred cubic feet of the above reservoir can be further compressed to 5000 psi by a single compressor which has an output capacity equal to that of the twelve compressors.

Pressure regulation is accomplished in two stages for accurate control. Two pneumatically controlled, contoured plug valves first reduce the pressure from the 5000-3000 psi field to approximately 600 psi. The pressure is then further reduced to the maximum stagnation pressure of 150 psi by a second set of similar valves.

The system may also be operated subatmospherically by isolating the high pressure system and introducing the air directly from the air drying bed described previously. Control in this case is accomplished by a pneumatically operated butterfly valve.

The supply air is heated by a commercial, indirect-fired combustion heater utilizing propane gas. Maximum heating rate is 1400 Btu/sec at air weight flows between 4 and 28 lbs/sec with corresponding output temperatures of $1200°F$ and $200°F$, respectively. Some temperature losses are sustained in the approximately 60 foot long piping leading from the heater exhaust to the settling chamber.

The air from the Boundary Layer Channel is exhausted into a 16 inch nominal diameter pipe, through a 16 inch gate valve, an aftercooler, and into the primary 36 inch diameter exhaust piping leading to the vacuum systems.

Two vacuum pumping systems are available. One system consists of four multistage centrifugal compressors each having a separate electrical motor drive with a combined rating of 12,000 horsepower. The nominal pumping speed is 90,000 cfm with a lower pressure limit of 5 mm Hg. This pumping plant is fully described in reference (2). The second system consists of seven rotary, sliding-vane pumps driven by four induction motors totaling 1200 horsepower. Pumping speeds vary between 7500 cfm and 22,500 cfm depending on pressure level. The low pressure limit is 2 mm Hg.

## The Channel

Figure 2 is a layout of the test facility showing the general arrangement of the settling chamber, semi-flexible nozzle, and diffuser.

The settling chamber, shown in figure 3, is comprised of a large (80 inch diameter by 229 inches long) cylinder into which are mounted diffusion, filtering, and straightening screens as well as the contoured inlet to the nozzle. The cylinder is fully insulated on the inside surface, and is rated at 150 psi and $1000^\circ$F. The approximate weight is 10 tons. The incoming air is diverged outward from a duct whose diameter increases from 28 inches to 60 inches. The diverging section contains a series of fine mesh diffusion and filtering screens for a length of 31 inches. Dirt accumulation on the screens is monitored by a pressure system. A transition section is located immediately downstream of the screens in which the flow cross-section is transformed from circular to square. The remainder of the settling chamber contains more screens which diminish in mesh size and spacing as they approach the nozzle inlet. The largest has an opening of 3 x 3 inches and the smallest .0165 x .0165 inch as shown in figure 3. The additional screens are designed to minimize the turbulence level of the flow.

An entrance funnel is located between the settling chamber and the nozzle inlet to direct the air flow smoothly into the nozzle throat. Two entrance funnels were fabricated, one for operation at a nominal nozzle exit Mach number of 3 and the other at 5. The contour of each entrance funnel has been designed to blend smoothly with the contour of the nozzle inlet.

The flexible plate nozzle, shown in figures 4 and 5, consists of the following: fixed inlet, the flexible plate, flat plate, side doors, outer and inner frames, inlet flange, exhaust flange, the jacks and related equipment. Total weight of the assembly is approximately 4-1/2 tons.

The nozzle throat block, which has a fixed contour extending from the nozzle inlet to 5 inches downstream of the throat, and the flexible plate are fabricated as one unit. The throat block contains internal water cooling passages designed to operate at maximum throat surface temperatures of $500^\circ$F. In the flexible plate region where the aerodynamic heating is considerably lower than at the throat, cooling is provided through copper tubes soldered to the back of the plate. The tubing has not hampered the flexibility of the plate and provide sufficient cooling to protect the seals along the edge of the plate and to maintain dimensional stability.

The half-inch thick flexible plate, whose width diverges from 12 inches at the throat to 13.5 inches at the exit, is approximately 10 feet long. It is a floating element supported to the nozzle framework by heavy screw jacks. The upstream throat section is attached by means of a heavily ribbed assembly containing a slide and screw arrangement. This allows throat openings from 1/32-inch to 3 inches.
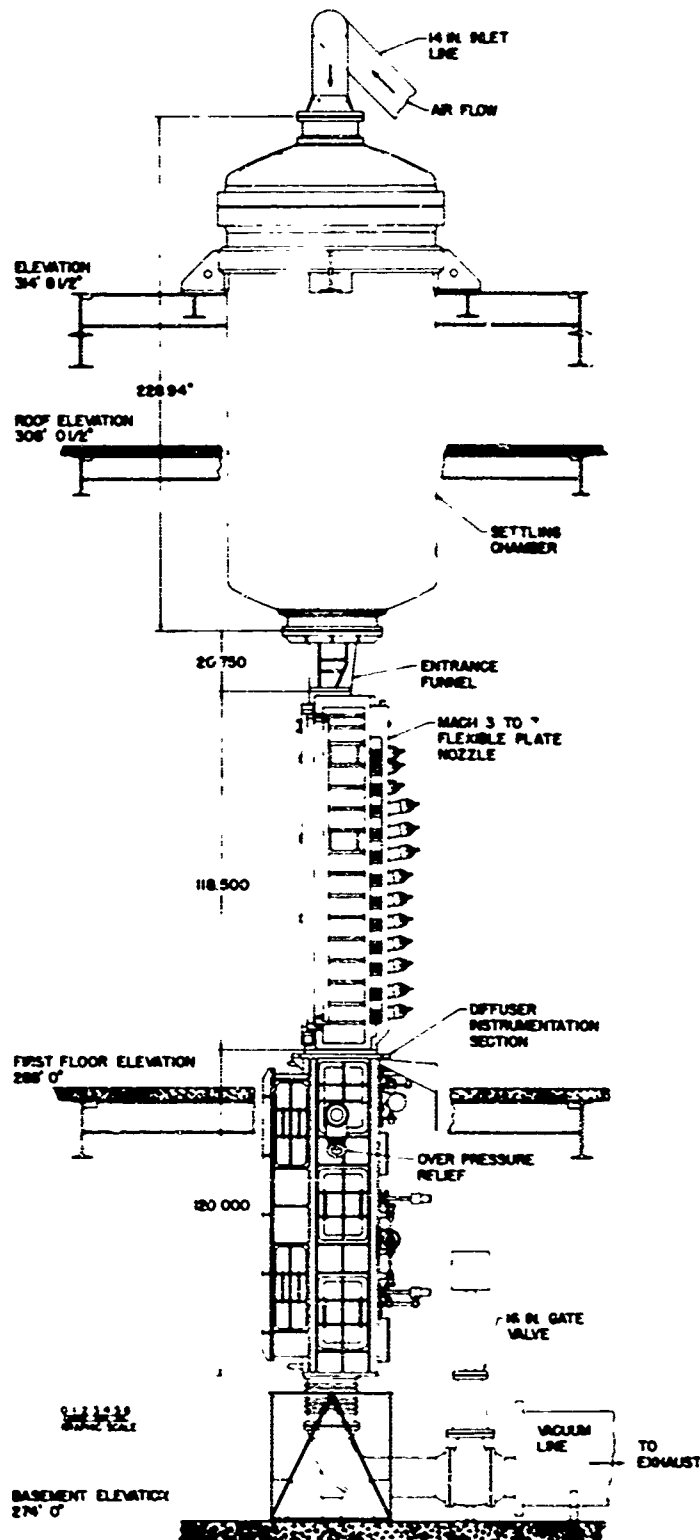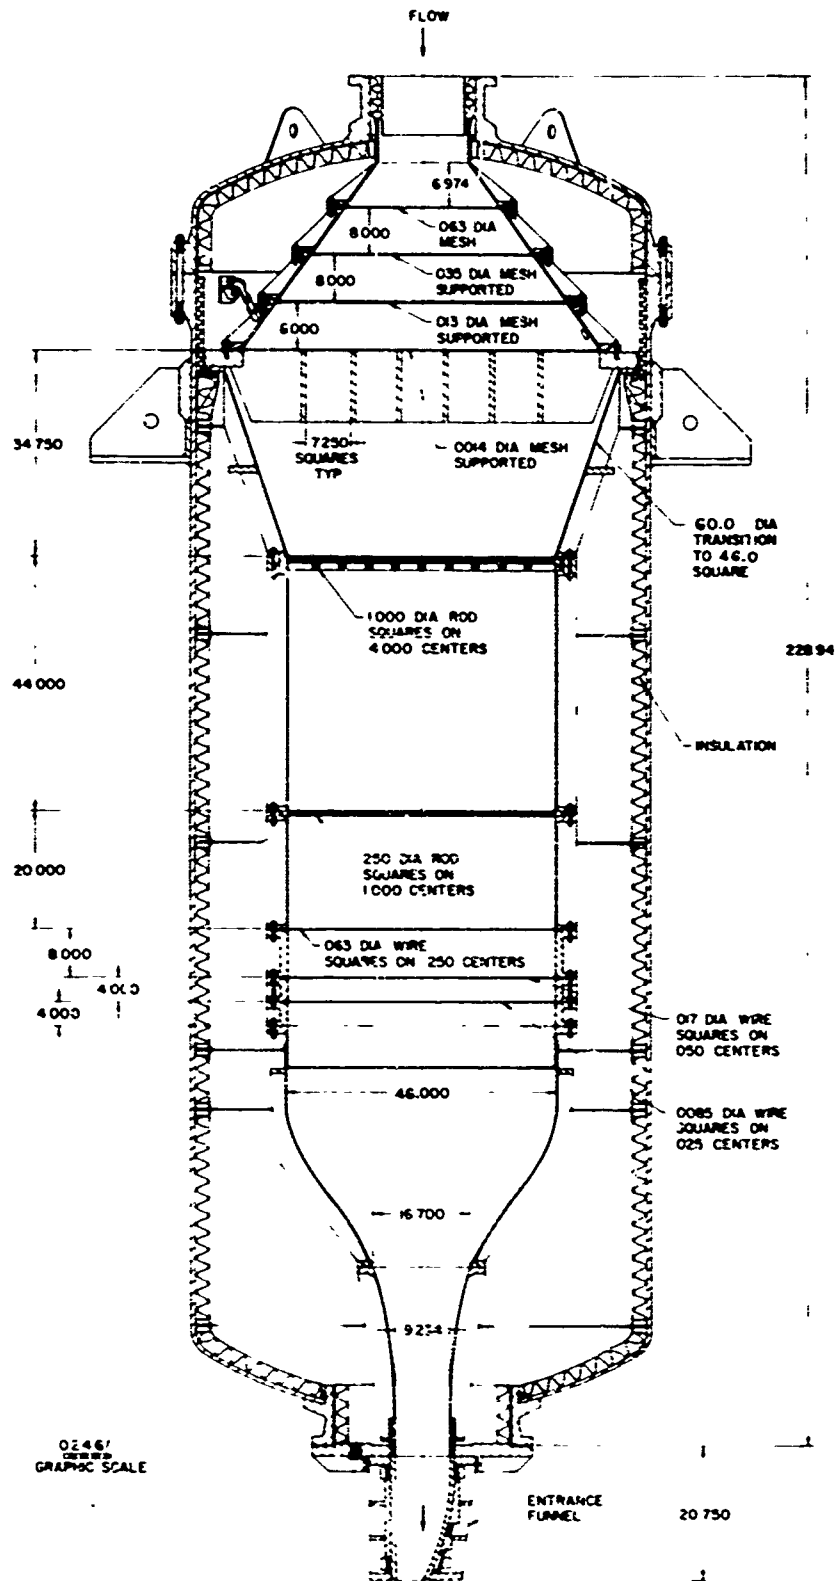
FIG.2 GENERAL ARRANGEMENT OF BOUNDARY LAYER CHANNEL

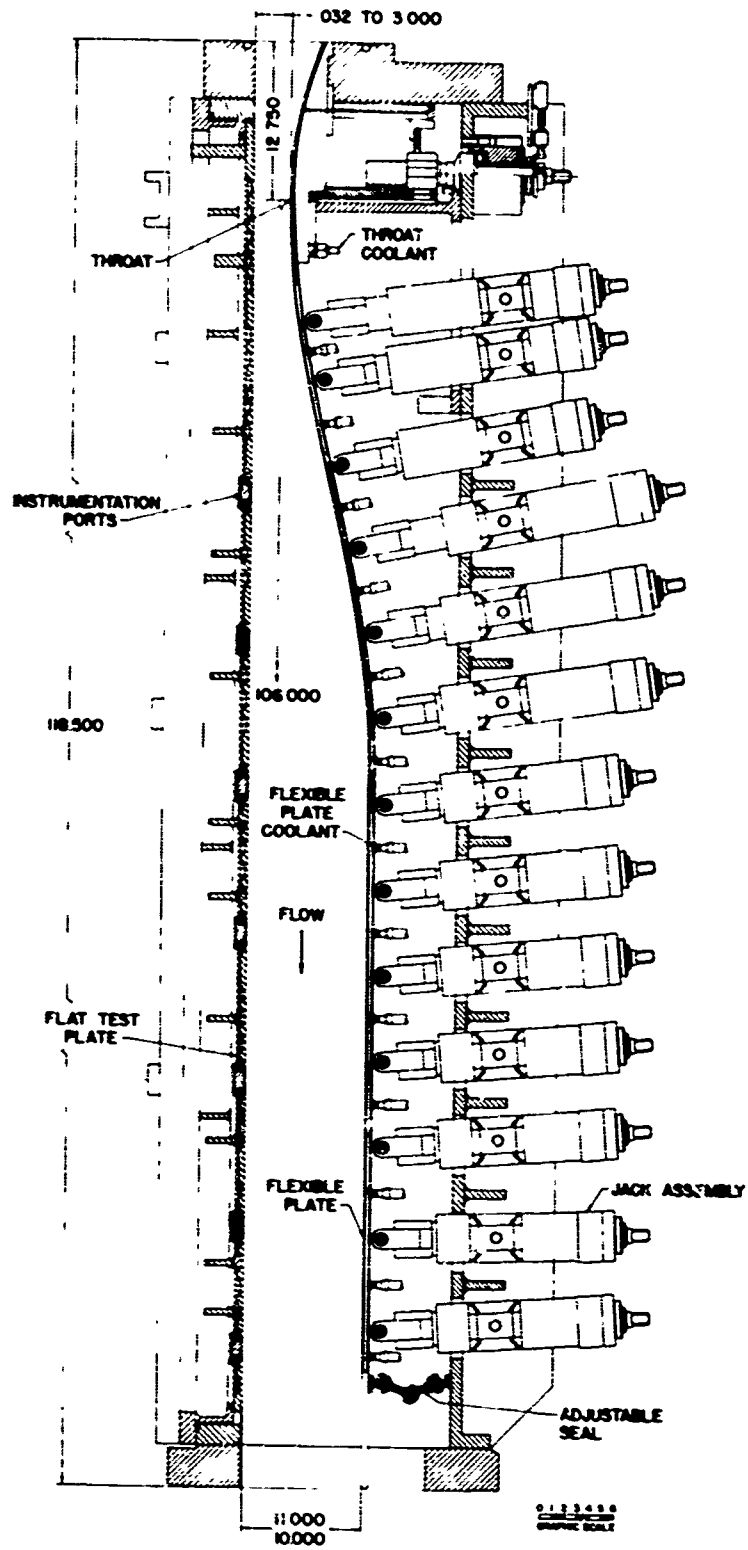FIG . 3 BOUNDARY LAYER CHANNEL SETTLING CHAMBER

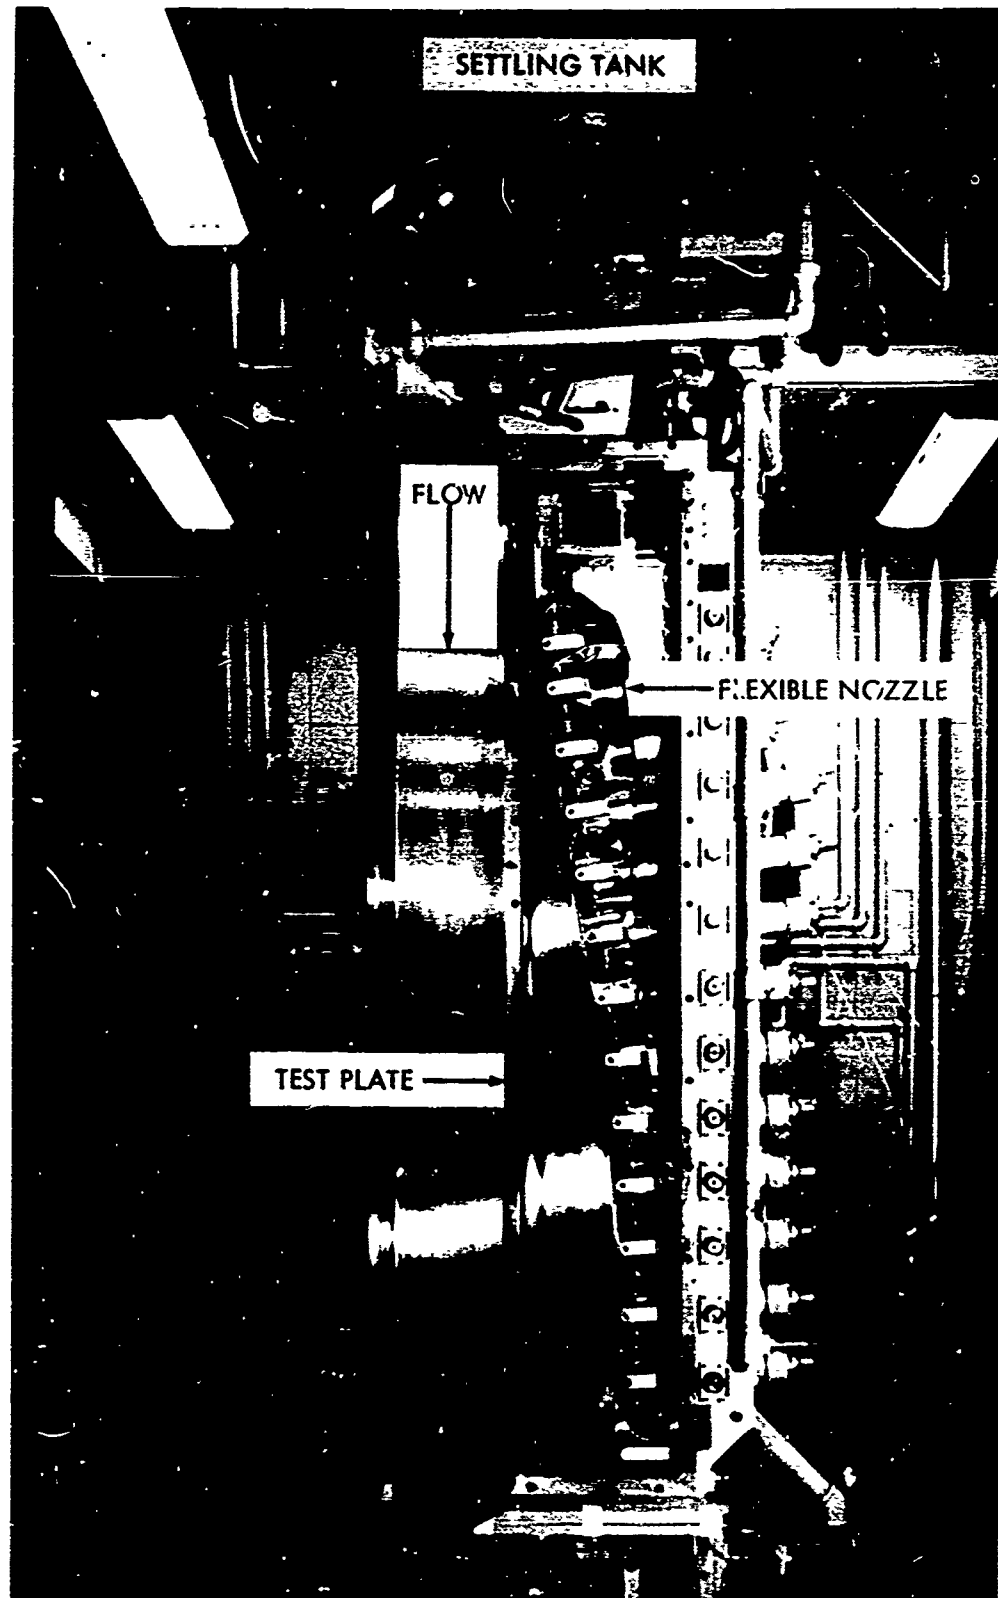FIG.4   BOUNDARY LAYER CHANNEL FLEXIBLE NOZZLE

FIG.5  N.O.L. BOUNDARY LAYER CHANNEL

Thirteen screw jacks spaced from 5 to 7 inches apart support and
maintain the proper contour in the flexible plate. Each jack is
hinge supported to the flexible plate and to the nozzle structure.
Consequently, the jackscrews control only the distance between the
two pivot supports and the jacks attain their own equilibrium angular
positions. The jacks and the throat block are manually operated.
Strain gages are located at each jack location to monitor the strain
on the plate. The maximum strain limit is 92,000 psi.

Air tight seals are provided by "O" rings around the edge of
the flexible plate and throat block. An adjustable web seal is
used at the nozzle exit to allow for thermal expansion of the heated
plate and to permit adjustments of the nozzle exit height between
10 and 11 inches.

The flat plate is a stainless steel weldment designed to operate
at uniform temperatures up to 500°F. Cooling passages, separated
into discrete compartments, were placed along the length of the plate.
To maintain dimensional stability over this temperature range it was
necessary to make the plate, in effect, a free floating body. This
was accomplished by supporting the flat plate to an auxiliary frame
by spring loaded clamps . At the upstream edge, the plate is butted
flush to the entrance funnel by means of two screw jacks. An "O"
ring seal is used between the mating sections here to prevent the
high pressure air from by-passing the nozzle throat region. The two
side edges of the plate are beveled and a wedge type seal is used
to provide for thermal expansion.

Static pressure orifices of 1/32 inch diameter, were provided
along the center of the plate at 2 inch intervals. In addition,
instrumentation ports, 1-7/8 inches in diameter, are provided every
12 inches starting at a station 24 inches downstream of the nozzle
throat.

The doors are stainless steel weldments, hinged to the primary
framework and water-cooled. Static pressure orifices are also
provided in the downstream portion of one door. These orifices are
located 4 inches apart and 3.5 inches from the flat plate. The doors
are designed for maximum deflection of .0015 inch and each weighs
approximately 600 pounds. The doors align the flexible plate and
they are bolted to the primary framework during a test.

Figure 6 illustrates the variable plate diffuser. It is a non-
symmetrical, two-dimensional flow duct utilizing hinged plates which
can be positioned to form a converging-diverging configuration with
a parallel throat. The width of the diffuser plate is 13 inches and
the overall length is 10 feet with the convergent portion occupying
40 percent of the length. The upstream plate is attached at the inlet
to a pivot which is positioned by an electric motor to align the leading
edge of the plate with the opening of the nozzle. A second motor
adjusts the opening of the parallel diffuser throat. The angle of the
subsonic diffuser plate is maintained at four degrees. A flexible
seal attached to the back of the second plate prevents recirculation
of the air flow. All walls of the diffuser exposed to the air flow
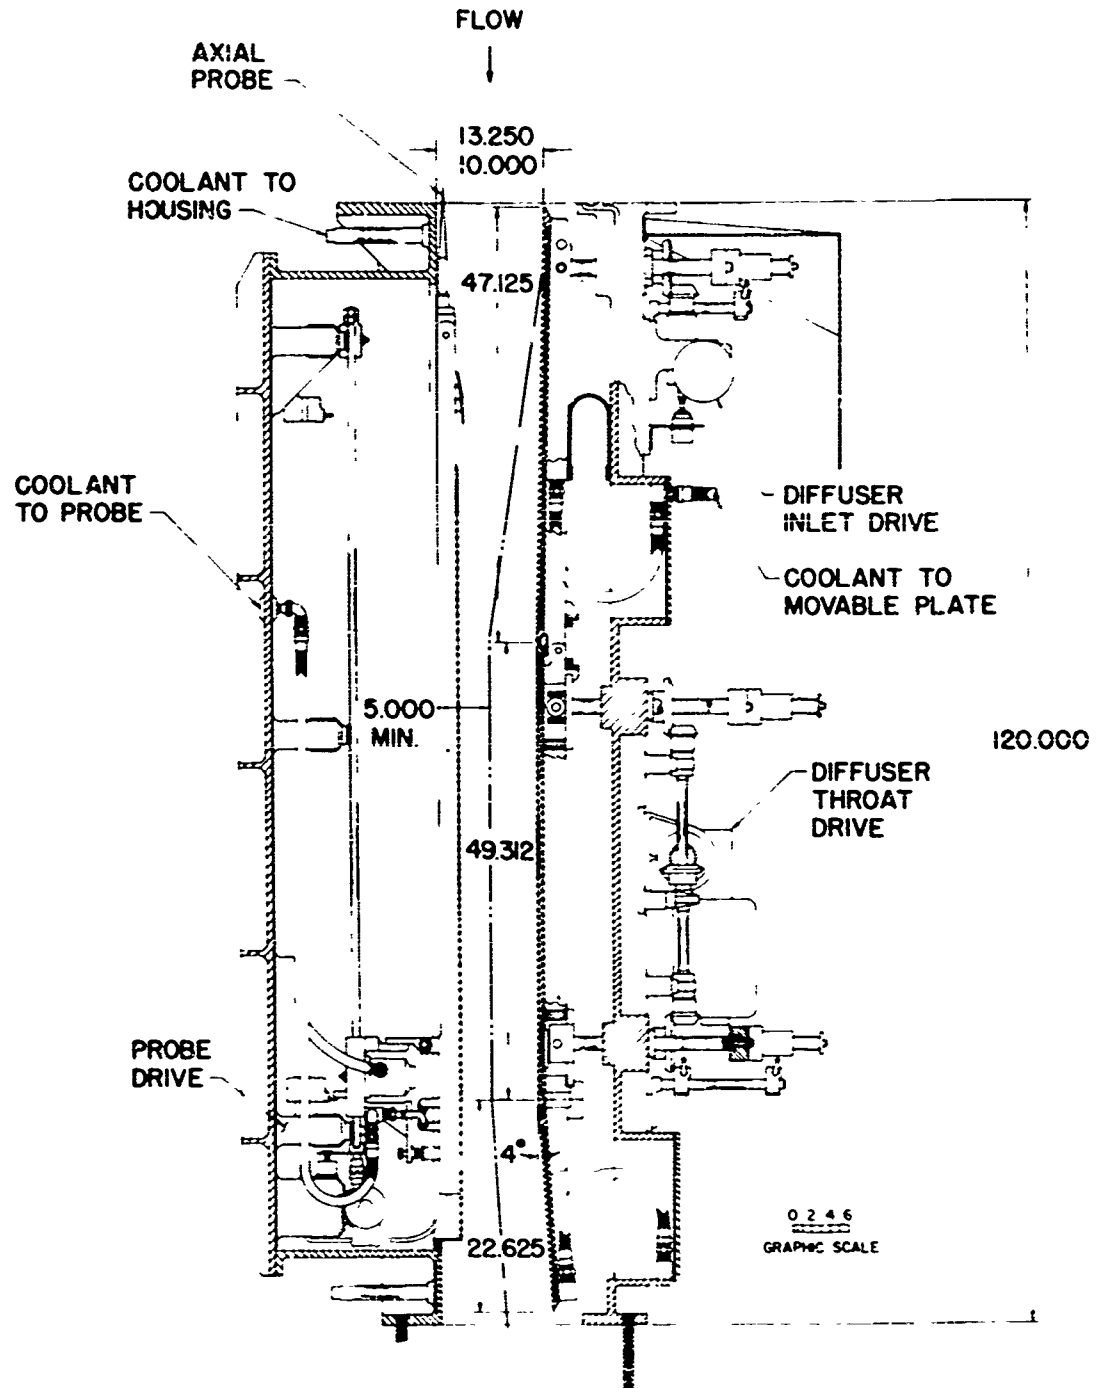
FIG.6  BOUNDARY LAYER CHANNEL DIFFUSER

have internal coolant passages to protect the plate and the seal arrangement.

The straight wall of the diffuser has a 1-1/2 inch wide by 2 inch high rectangular cross-section channel along its center line. This channel houses the axial drive mechanism which will be discussed later.

Nozzle Contours

The flexible nozzle plate was fabricated as an integral part of the rigid throat block. The contour of the subsonic inlet portion of the throat block is defined by the quintic:

$$y = (8.9891 \times 10^{-7}) \, x^5 - (7.0954 \times 10^{-5}) \, x^4$$
$$+ (1.3418 \times 10^{-3} \, x^3 + .008 \, x^3 \tag{1}$$
$$\text{for } [-12.75 \le x \le 0]$$

The coordinates $(x,y)$ are in inches and are $(0,0)$ on the throat block at the minimum area cross section. The contour of the supersonic portion of the throat block is defined by the cubic:

$$y = - (1.1905 \times 10^{-4}) \, x^3 + .008 \, x^2$$
$$\text{for } 0 \le x \le 5 \tag{2}$$

The latter is derived from the following boundary conditions:

$$x = 0, \ y = 0, \ R_{ct} = 62.5" = \frac{d^2y/dx^2}{\left[1 + \left(\frac{dy}{dx}\right)^2\right]^{3/2}}$$

$$x = 22.4", \text{ wall angle} = 10 \text{ degrees} = \tan^{-1}\left(\frac{dy}{dx}\right)$$

The method selected for calculating the flexible plate contour is identical to the two-dimensional flow design procedure used for rigid block nozzles employed in the other NOL facilities (refs. (3), (4), and (5)) and which is coded for the IBM 7090 high speed computer. Essentially the method needs a prescribed center line Mach number distribution from which a potential flow wall contour is computed by the method of characteristics. In the Boundary Layer Channel, the flow along the test plate is the flow prescribed along the center line of the conventional supersonic nozzle. The design procedure includes a laminar, transitional, or turbulent boundary layer correction by the methods used in references (4), (6), and (7), respectively, to produce the final geometric contour.

In applying this design method to the channel configuration, the center line Mach number distribution used in reference (5), namely,

$$M = M_T - \frac{M_T - 1}{X_T^2} (1 + BX)(X - X_T)^2 \tag{3}$$

seems to be satisfactory. Equation (3) shows that the nozzle design variables are limited to $M_T$, $X_T$, and B. The coefficient B is determined by the values of $R_{ct}$, y* at M = 1 in equation (3) and also $M_T$ and γ. Among the above variables only $R_{ct}$ and γ are fixed quantities. Two of the remaining three quantities, namely, $M_T$ and $X_T$ must be adjusted such that the completed nozzle contour with the boundary layer corrections matches the physical nozzle opening at the downstream end of the rigid throat block (at x = 5 inches) for the desired nozzle throat opening, y*. The nozzle is designed iteratively for a desired exit Mach number $M_T$, by initially assuming a nozzle core height of 8 inches from which the nozzle throat opening, y*, can be determined using isentropic flow tables. The length of the test rhombus can be computed knowing $M_T$. $X_T$ is then the dimensionless distance from the nozzle throat to exit, less the length of the test rhombus and less any desired uniform flow length. These three quantities, $M_T$, $X_T$ and y* plus the two fixed quantities are sufficient input to the computer program to calculate a potential flow contour. This contour together with the assumed operating supply temperature and pressure and the type of boundary layer flow, i.e., laminar, transitional, or turbulent, are then used in a second computer program to calculate the boundary layer displacement thickness δ*, on both the flat plate and the flexible plate surfaces. The combined 8 inch exit core height plus boundary layer corrections are then compared with the physical nozzle exit opening. The procedure is then repeated with a different exit height assumption such that the exit height together with the boundary layer correction is within the limits of the range of the physical nozzle exit opening. The value of $X_T$ is then adjusted until the computed nozzle opening at the 5 inch station (including boundary layer corrections) agrees with the physical opening of the nozzle throat block. The final constants in equation (3) for the Mach 5 nozzle setting are: B = .0234, $M_T$ = 4.8, and $X_T$ = 6.44. The computed boundary layer growth on both plates is shown in figures 7, 8, and 9 for operations at supply temperatures of 1000°R and supply pressures of 1, 5, and 10 atmospheres, respectively.

Adjusting the flexible plate to the computed contour is a tedious process because the jacks give the correct setting only at discrete points and the contour between these points assumes an equilibrium position in accordance with the stresses on the plate. Strain was monitored during the setting procedure and was found to be within the
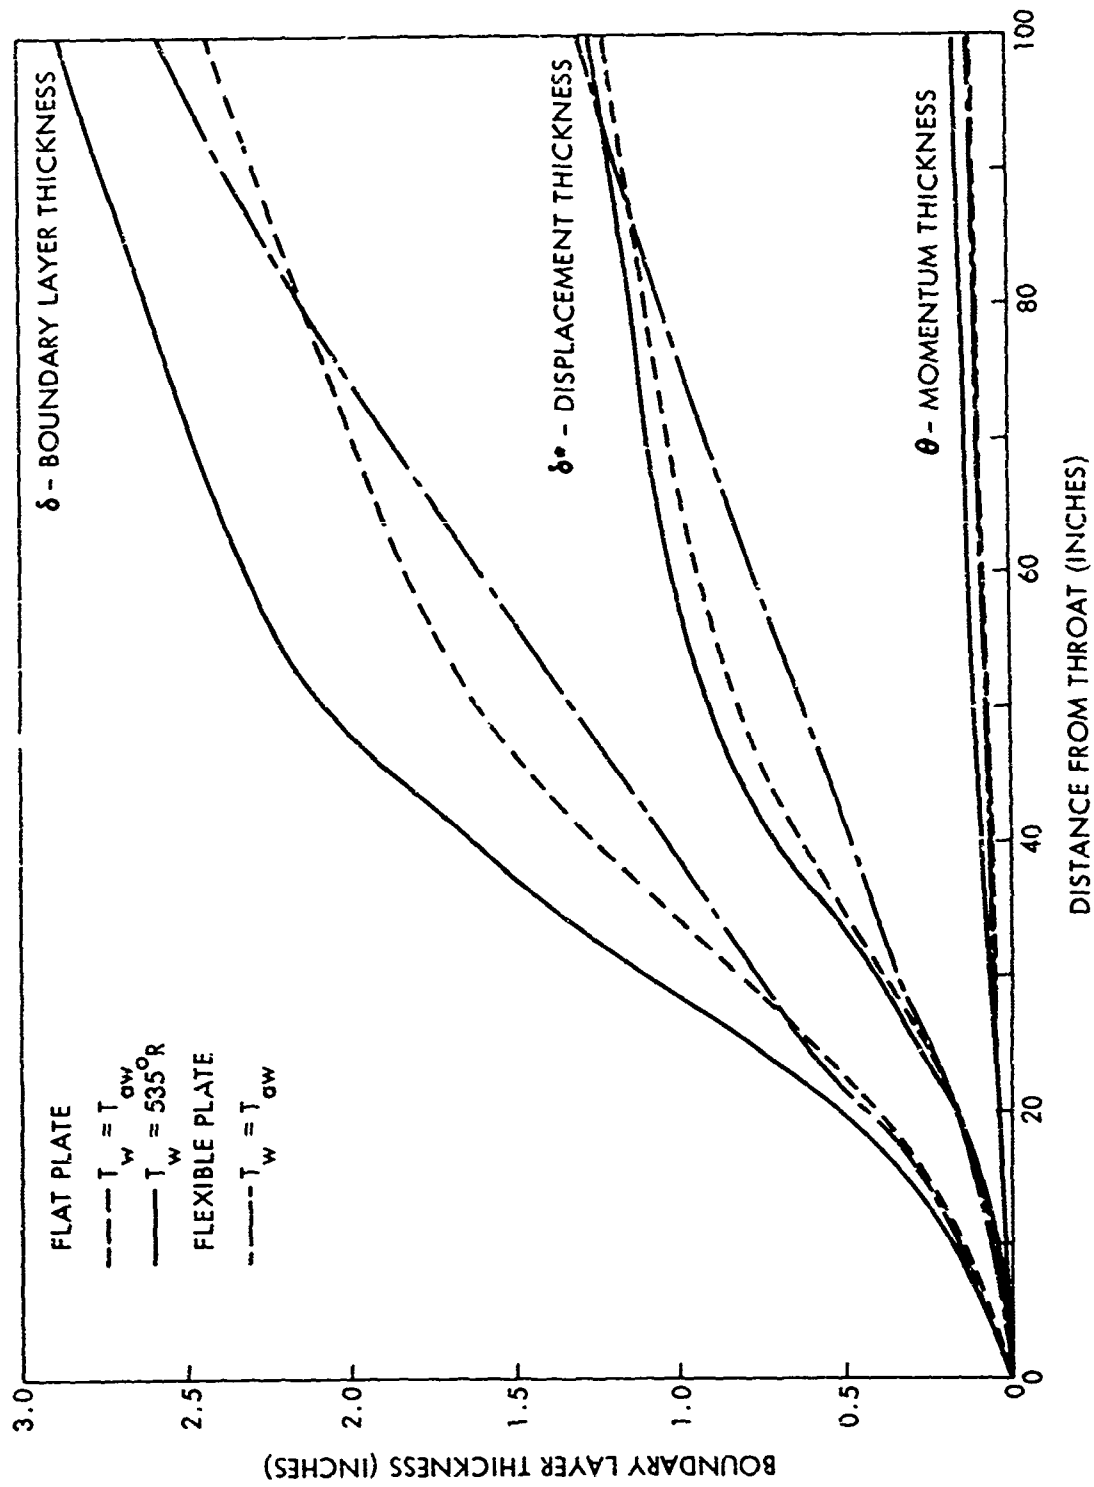
FIG.7 COMPUTED BOUNDARY LAYER GROWTH FOR MACH 5, $P_o = 1$ ATM, $T_o = 1000°R$

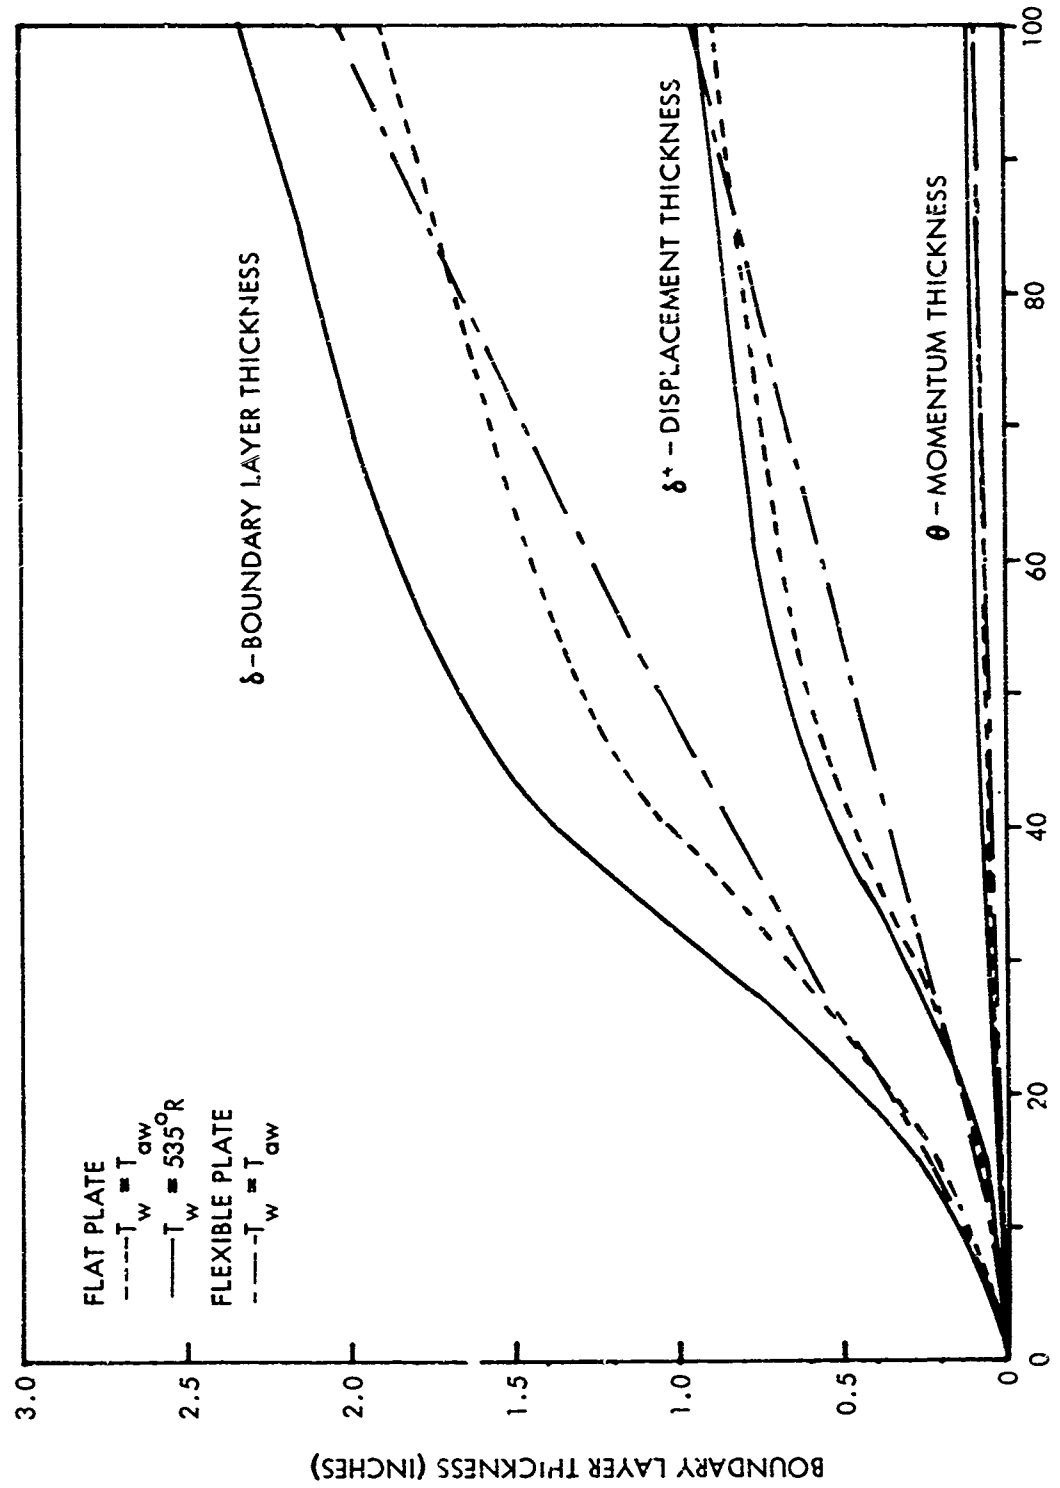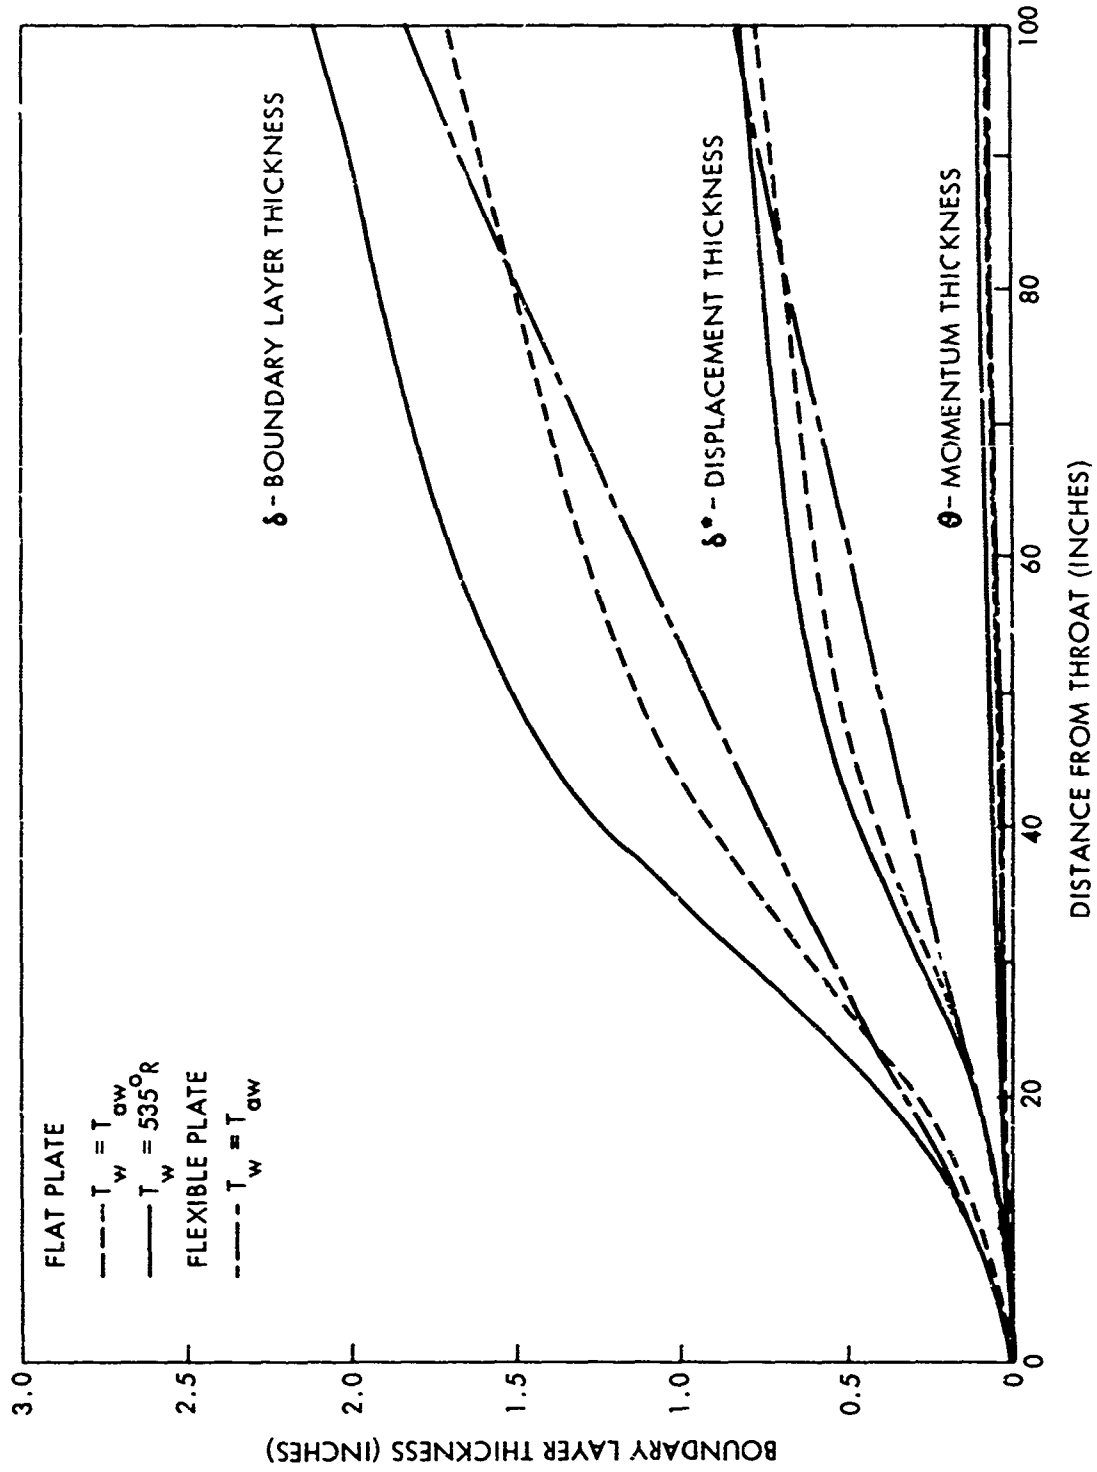FIG.8  COMPUTED BOUNDARY LAYER GROWTH FOR MACH 5, $P_o$ = 5 ATM, $T_o$ = 1000 °R

FIG. 9 COMPUTED BOUNDARY LAYER GROWTH FOR MACH 5, $P_o$ = 10 ATM, $T_o$ = 1000°R

specified structural limits. The contour of the flexible plate was
set for supply conditions of 5 atmospheres and 1000°R which are con-
sidered to be median operating conditions. The actual adjustment of
the plate was done as follows. The flexible plate was initially
adjusted to the computed contour at each jack location. The uniformity
of the flow was then measured with a Pitot probe driven axially in
the freestream. The most severe compression waves detected were
traced back to the contoured wall by a straight line projection of the
disturbance at the direction determined by the local Mach angle. The
nearest jack was adjusted to minimize the disturbance. The process
was repeated until sufficient flow uniformity was obtained. It was
found that the adjustment of a jack affected the contour at distances
as much as three jack locations away and causes a corresponding
change in measured flow conditions.

The final nozzle contour coordinates were measured at one inch
increments using a specially designed instrument whose measuring
accuracy is less than .002 of an inch. The measurements are compared
with the computed contour and the differences are shown by the dashed
line in figure 10. Measurements at the jack locations (circled points)
show a systematic displacement from the computed contour. Measure-
ments between jack locations show a different systematic displacement
from the computed contour and also show that relatively sharp bending
occurs near the jack location.

At the end of six months of operation the contour of the flexible
plate was again measured, completely released and reset to the initial
flow calibrated (final) contour setting. This was done by adjusting
each successive jack to the calibrated setting, starting with the
most upstream jack and working downward. The results are also shown
in figure 10. The change in nozzle contour in six months can be as
much as 0.020 inch as shown by the dot-dashed curve. The reset
contour as compared with the computed contour is shown by the solid
curve. Adjusting the flexible plate to a prescribed contour requires
many readjustments of the screw jacks. This is so because by moving
one jack setting, the angular position of neighboring jacks changes
and in turn the coordinates of the plate at the neighboring jack sta-
tions is not identical to the original final contour. The differences
can be seen by comparing the solid curve and dashed curve in figure 10.

The measured stress at each jack location, as anticipated, is
greater upstream where the radius of curvature is smaller. The
stresses can be monitored during the test. Table I is a summary of
the typical stress measurements recorded at selected operating supply
pressures.

## INSTRUMENTATION

### Axial Drive

In order to investigate the flow distribution along the flat
plate an axial probe drive mechanism was installed within the tunnel
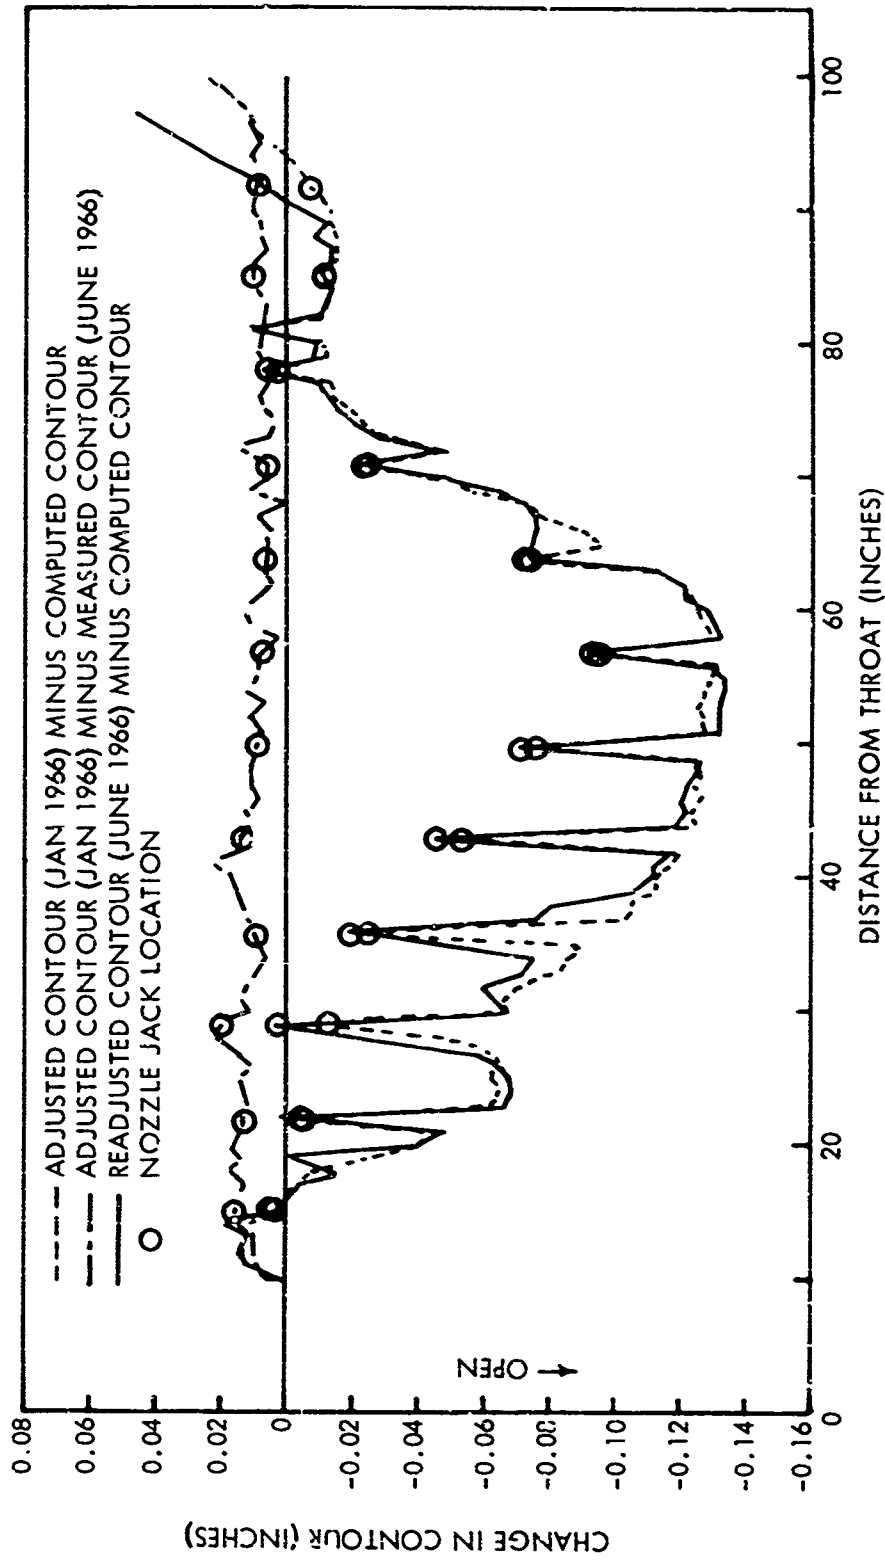(see also discussion of diffuser). This mechanism is powered by an

FIG. 10   CHANGES OF FLEXIBLE PLATE NOZZLE CONTOUR

TABLE I

STRAIN GAGE MEASUREMENTS ON FLEXIBLE PLATE*

| Gage No. | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Distance From Throat (In.) | 10 | 15 | 22 | 29 | 36 | 43 | 50 | 57 | 64 | 71 | 78 | 85 | 92 |
| Static Reading | 40.5 C | 80.7 C | 76.2 C | 12.9 C | 62.4 T | 32.4 T | 38.2 T | 28.6 T | 13.2 T | 5.70 T | 22.8 T | 19.2 T | 5.55 T |
| Under Vacuum | 40.5 C | 79.8 C | 74.8 C | 13.0 C | 64.5 T | 34.6 T | 38.7 T | 31.5 T | 13.2 T | 7.95 T | 24.0 T | 21.6 T | 5.10 T |
| $P_o$ = 10 atm | 33.3 C | 62.1 C | 82.2 C | 13.5 C | 62.1 T | 33.0 T | 36.6 T | 30.0 T | 10.8 T | 6.00 T | 22.4 T | -- | 2.70 T |
| $P_o$ = 5 atm | 34.4 C | 78.8 C | 81.0 C | 15.8 C | 62.2 T | 33.6 T | 36.6 T | 30.3 T | 11.2 T | 6.75 T | 22.4 T | -- | 3.45 T |
| $P_o$ = 1 atm | 39.6 C | 72.5 C | 76.8 C | 13.4 C | 64.2 T | 35.4 T | 38.4 T | 31.5 T | 13.0 T | 7.95 T | 23.8 T | -- | 4.80 T |

* $10^3$ lb/in$^2$

C = Compression

T = Tension

electric motor housed in the diffuser casing. Probe speed and
distance traveled are controlled by the channel operator. The axial
distance is read out through a servo-system and recorded automati-
cally. The drive mechanism can be used to support as many as five
probes at various distances from the flat plate. An airfoil mounted
behind the probes is designed to give negative lift which keeps the
drive mechanism pressed against the testing surface. Copper rollers
are spring mounted at the sides of the probe support enabling the
mechanism to glide smoothly along the tunnel walls. The maximum
travel along the flat plate is about 50 inches.

## Boundary Layer Traverse

For boundary layer profile surveys an electrically operated
water-cooled micro-traverse has been designed for use at several
stations on the test plate. Total travel of the traverse is 2.50
inches. The traverse design permits two probes to be used simul-
taneously. Location of the traverse mechanism is obtained directly
from a dial counter which can be read with an accuracy of $\pm 0.001$ inch
or from a digital voltmeter with an accuracy of $\pm 0.0005$ inch.

## Boundary Layer Probes

In order to determine the flow properties through the boundary
layer, three quantities must be known; the static pressure, Pitot
pressure, and total temperature. Usually the static pressure is
assumed to be constant through the boundary layer and equal to the
wall pressure. Presently, the Pitot pressures are being measured
with small probes made from 0.125 of an inch stainless steel tubing
flattened at the tip to a rectangular opening with a half-height of
0.010 of an inch. An equilibrium conical temperature probe (ref. (8))
is used to determine the stagnation temperature through the boundary
layer. Probe pressures are read out directly from mercury and oil
manometers or are measured with pressure transducers. Probe tempera-
tures are recorded on a variable span strip chart recorder and on the
PADRE (Portable Automatic Data Recording Equipment), reference (9).

## Hot Wire Anemometer

A Shapiro-Edwards Model 50 Constant Current Hot Wire Anemometer
system is available to investigate the fluctuating quantities of the
hypersonic turbulent boundary layer.

## Skin Friction Balance

An important part of boundary layer research is the determination
of skin friction. Many investigators have obtained skin friction
measurements from measured velocity profile gradients. Much contro-
versy has arisen as to the accuracy of the data obtained in this manner.

It is felt that a comparison should be made between skin friction co-
efficients obtained using a skin friction balance and those obtained
from profile measurements. There have been some data published
showing such a comparison, i.e., reference (1). In this particular
reference most of the data were obtained under adiabatic wall con-
ditions. A comparison of data with heat transfer is obviously needed.
A skin friction balance has been designed at NOL to obtain direct
measurements of skin friction (refs. (11) and (12)), see figure 11.
The balance is designed for measurements in the presence of heat
transfer and pressure gradient.

## Data Handling

Presently, the boundary layer data are recorded automatically
and continuously on NOL's PADRE which is described in reference (9).
This unit provides seven channels with servo-systems and direct digital
conversion to IBM cards. The IBM card output is used directly with
NOL's IBM 7090 computer for the data reduction programs. Several
programs are available for reduction of the various tests made in the
channel. The use of an automatic plotter expedites the interpretation
of the recorded data.

## PERFORMANCE

The temperature and pressure operating envelope of the Boundary
Layer Channel at the Mach number 5 nozzle throat setting is shown in
figure 12. Also shown are the air mass flow rate and the operating
time required to deplete the air supply reservoir. The temperature
drop measured in the Boundary Layer Channel is greater than previously
reported for the NOL Hypersonic Tunnel No. 4, reference (1), due
to the longer lengths of piping and the more massive settling tank.
The temperature drop becomes greater at lower mass flow. It was not
possible to sustain continuous supersonic flow at supply pressures
below four atmospheres with the rotary vane vacuum pumping system
described earlier.

The performance envelope is extended to the Mach number 3
operating conditions by assuming the same heater output efficiency
for the same air mass flow rates and pressures. This is shown in
figure 13. At high mass flow rates which are well beyond the
original intended range of the heater, very little temperature gain
can be expected.

Temperature uniformity of the subsonic inlet flow in the entrance
funnel is shown in figures 14 and 15. These measurements were made
with the standard subsonic total temperature probe described in ref-
erence (13). The survey method employs a probe which spans the two
opposite walls; the north-south being the side walls, the east-west
being the flat plate and the contoured surface. A second total
temperature probe placed at a fixed point away from the surveying
region, was used as the reference temperature. This reference tempera-
ture measurement removed the uncertainty of the variation of supply
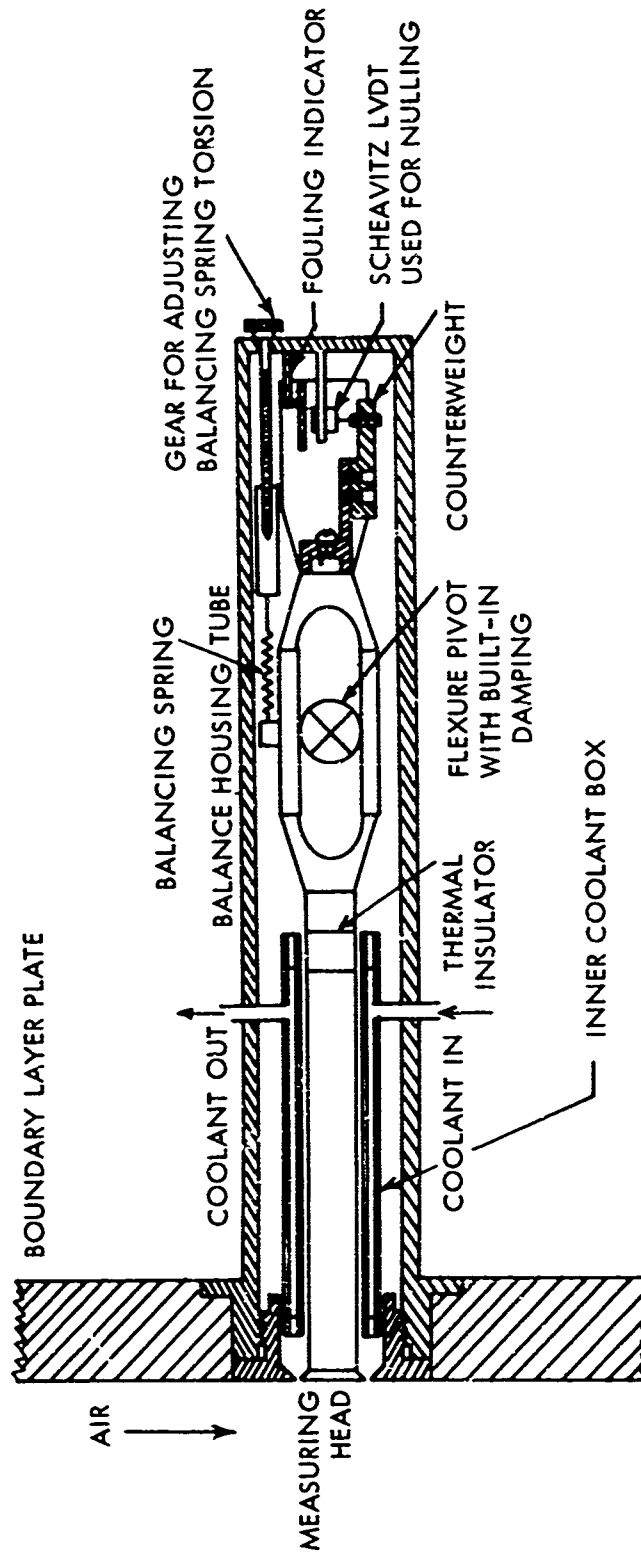temperature with time.

FIG. 11 SCHEMATIC SHOWING OVERALL LAYOUT OF THE SKIN FRICTION BALANCE
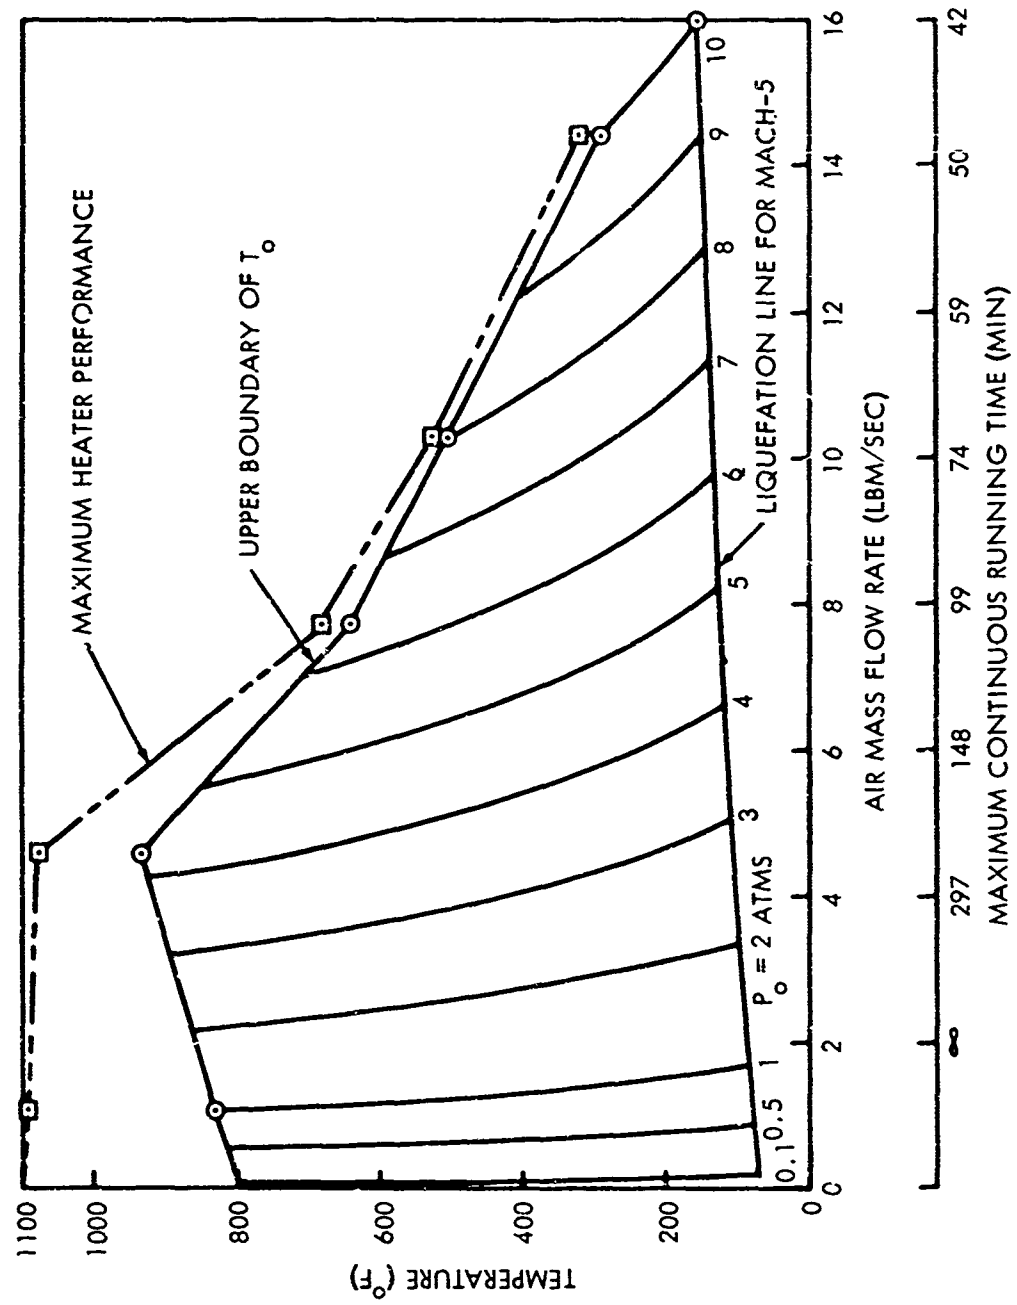
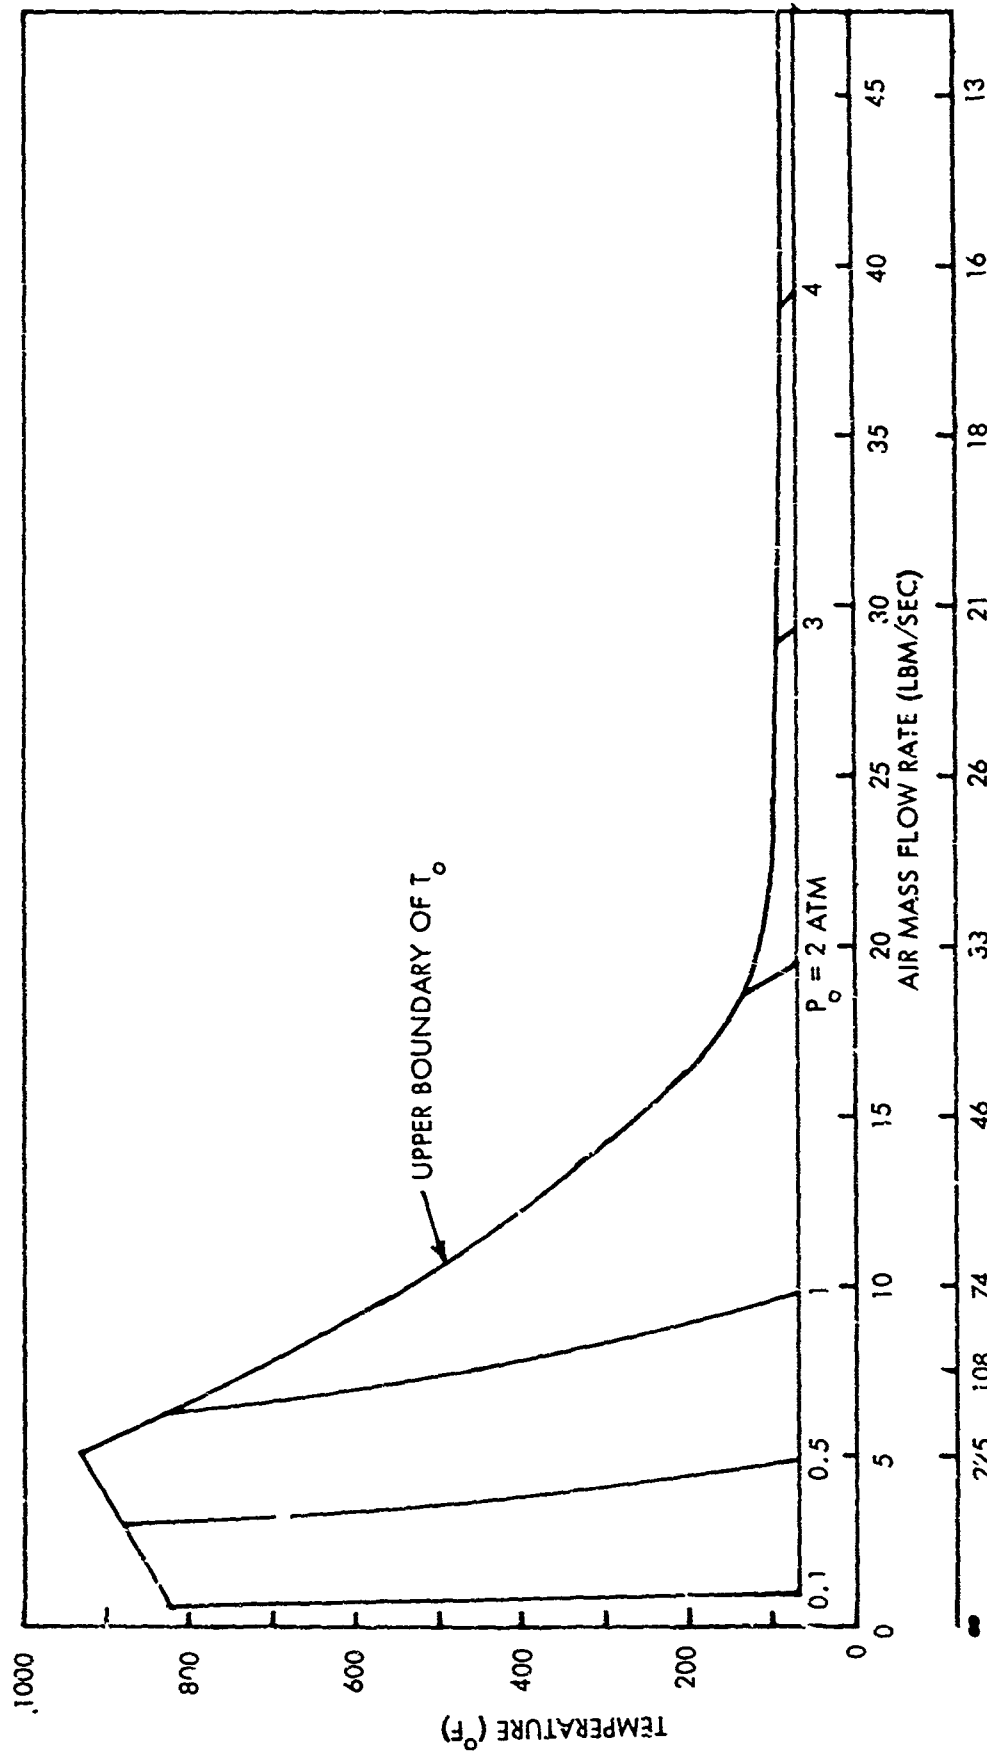FIG. 12  OPERATING ENVELOPE FOR THE BOUNDARY LAYER CHANNEL, MACH 5

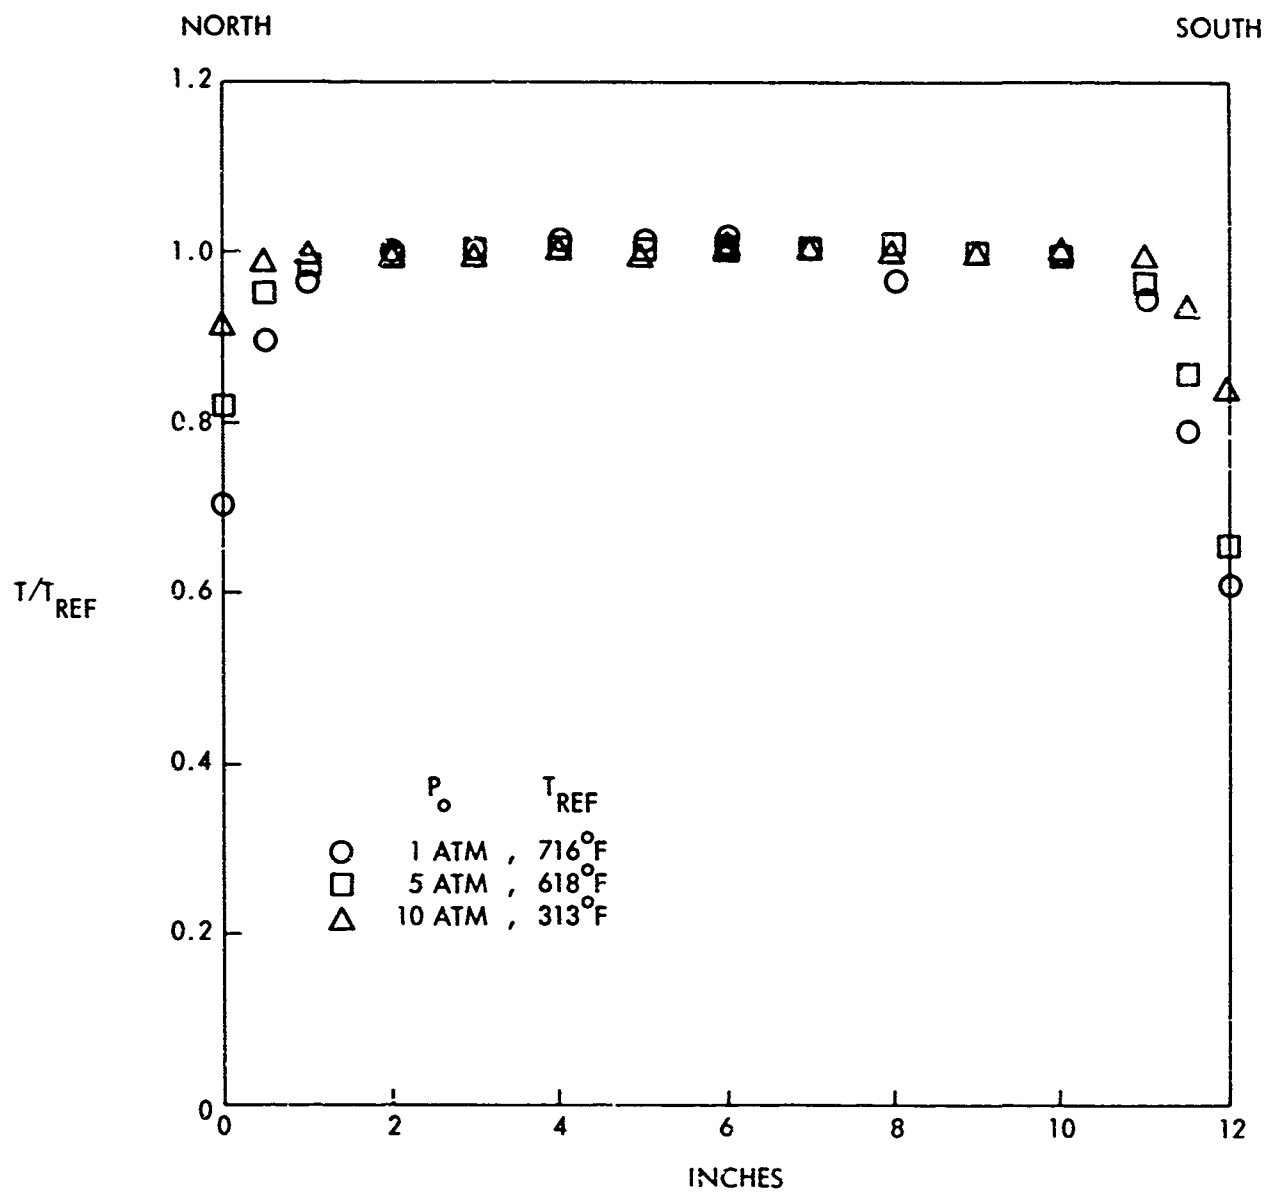FIG.13 OPERATING ENVELOPE FOR THE BOUNDARY LAYER CHANNEL, MACH 3

FIG.14   INLET TEMPERATURE PROFILE IN THE NORTH-SOUTH DIRECTION, X = -22".5
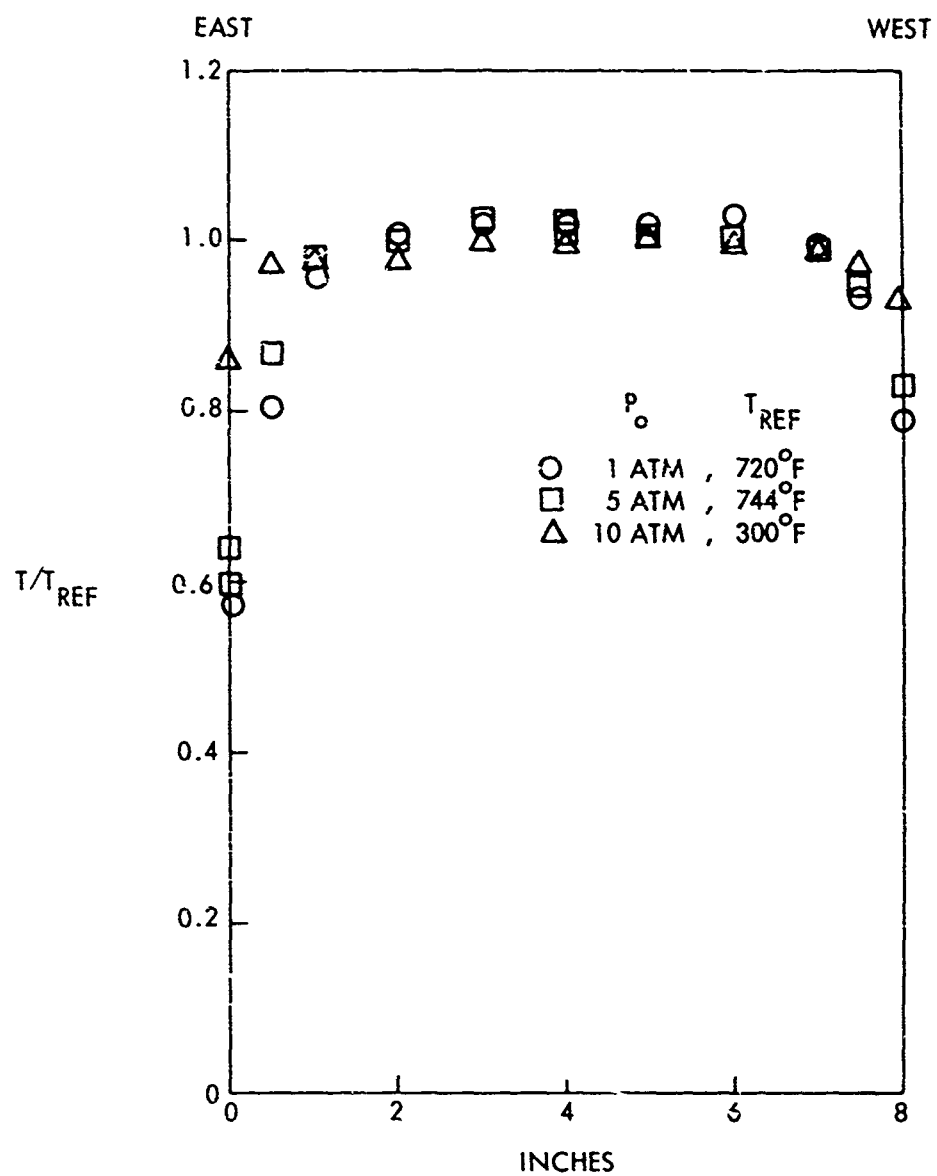
FIG.15 INLET TEMPERATURE PROFILE IN THE EAST-WEST DIRECTION, X = -22."5

Figures 16, 17, and 18 are detailed free-stream calibration curves for the Mach 4.8 nozzle setting at 1, 5, and 10 atmosphere supply pressures, respectively. The Pitot pressures were measured with a five finger rake traversed in the axial direction with the probe heads in a plane 4 inches above the flat plate. The Pitot probes were 1.5 inches apart with the center probe traversing above the center line of the flat plate. The nozzle contour is designed to produce a zero pressure gradient flow on the flat plate beginning at 55 inches downstream from the nozzle throat when operated at 5 atmosphere supply pressure.

Figure 19 shows the static pressure distribution orifices located along the center line of the flat plate (circled points) on the flat plate 2.5 inches from the plate center line (squared points) and on the diverging side wall 3.56 inches above the flat plate.

Figure 20 is a comparison of the measured boundary layer thickness at one axial location with the previously described computation for turbulent boundary layer thickness. The agreement between the measured and computed boundary layer thickness on the flat plate side of the nozzle is within 5 percent. The edge of the boundary layer was experimentally defined as the location where the Pitot pressure reaches a plateau when surveyed across the boundary layer. A typical Mach number profile through the boundary layer is shown in figure 21.

The efficiency of the diffuser was investigated for the Mach 5 setting and at supply pressures of 1 and 4 atmospheres. The results are shown in figures 22 and 23. At 1 atmosphere supply pressure the maximum pressure recovery is 79 percent of the Pitot pressure while at 4 atmosphere supply pressure, the recover is 96 percent. Since the boundary layer thickness in the channel is larger at lower operating supply pressures (see figures 7, 8, and 9), a larger diffuser throat opening is required at lower pressures and a lower pressure recovery results.

The computed Reynolds number simulation capability for the Mach numbers 5 and 3 flow conditions are shown in figures 24 and 25. These curves were determined from isentropic flow relations and the measured channel performances shown in figures 12 and 13.

Figure 26 is a graph of the computed momentum thickness Reynolds number capability for the Mach number 5 nozzle contour setting. The previously described laminar and turbulent boundary layer flow computational method was used. The laminar curves may be used to estimate where transition occurs on the plate.

## SUMMARY

A description has been given of the mechanical arrangement and aerodynamic performance of the NOL Boundary Layer Channel. It was designed to investigate the development of boundary layers in the transitional and turbulent regimes.
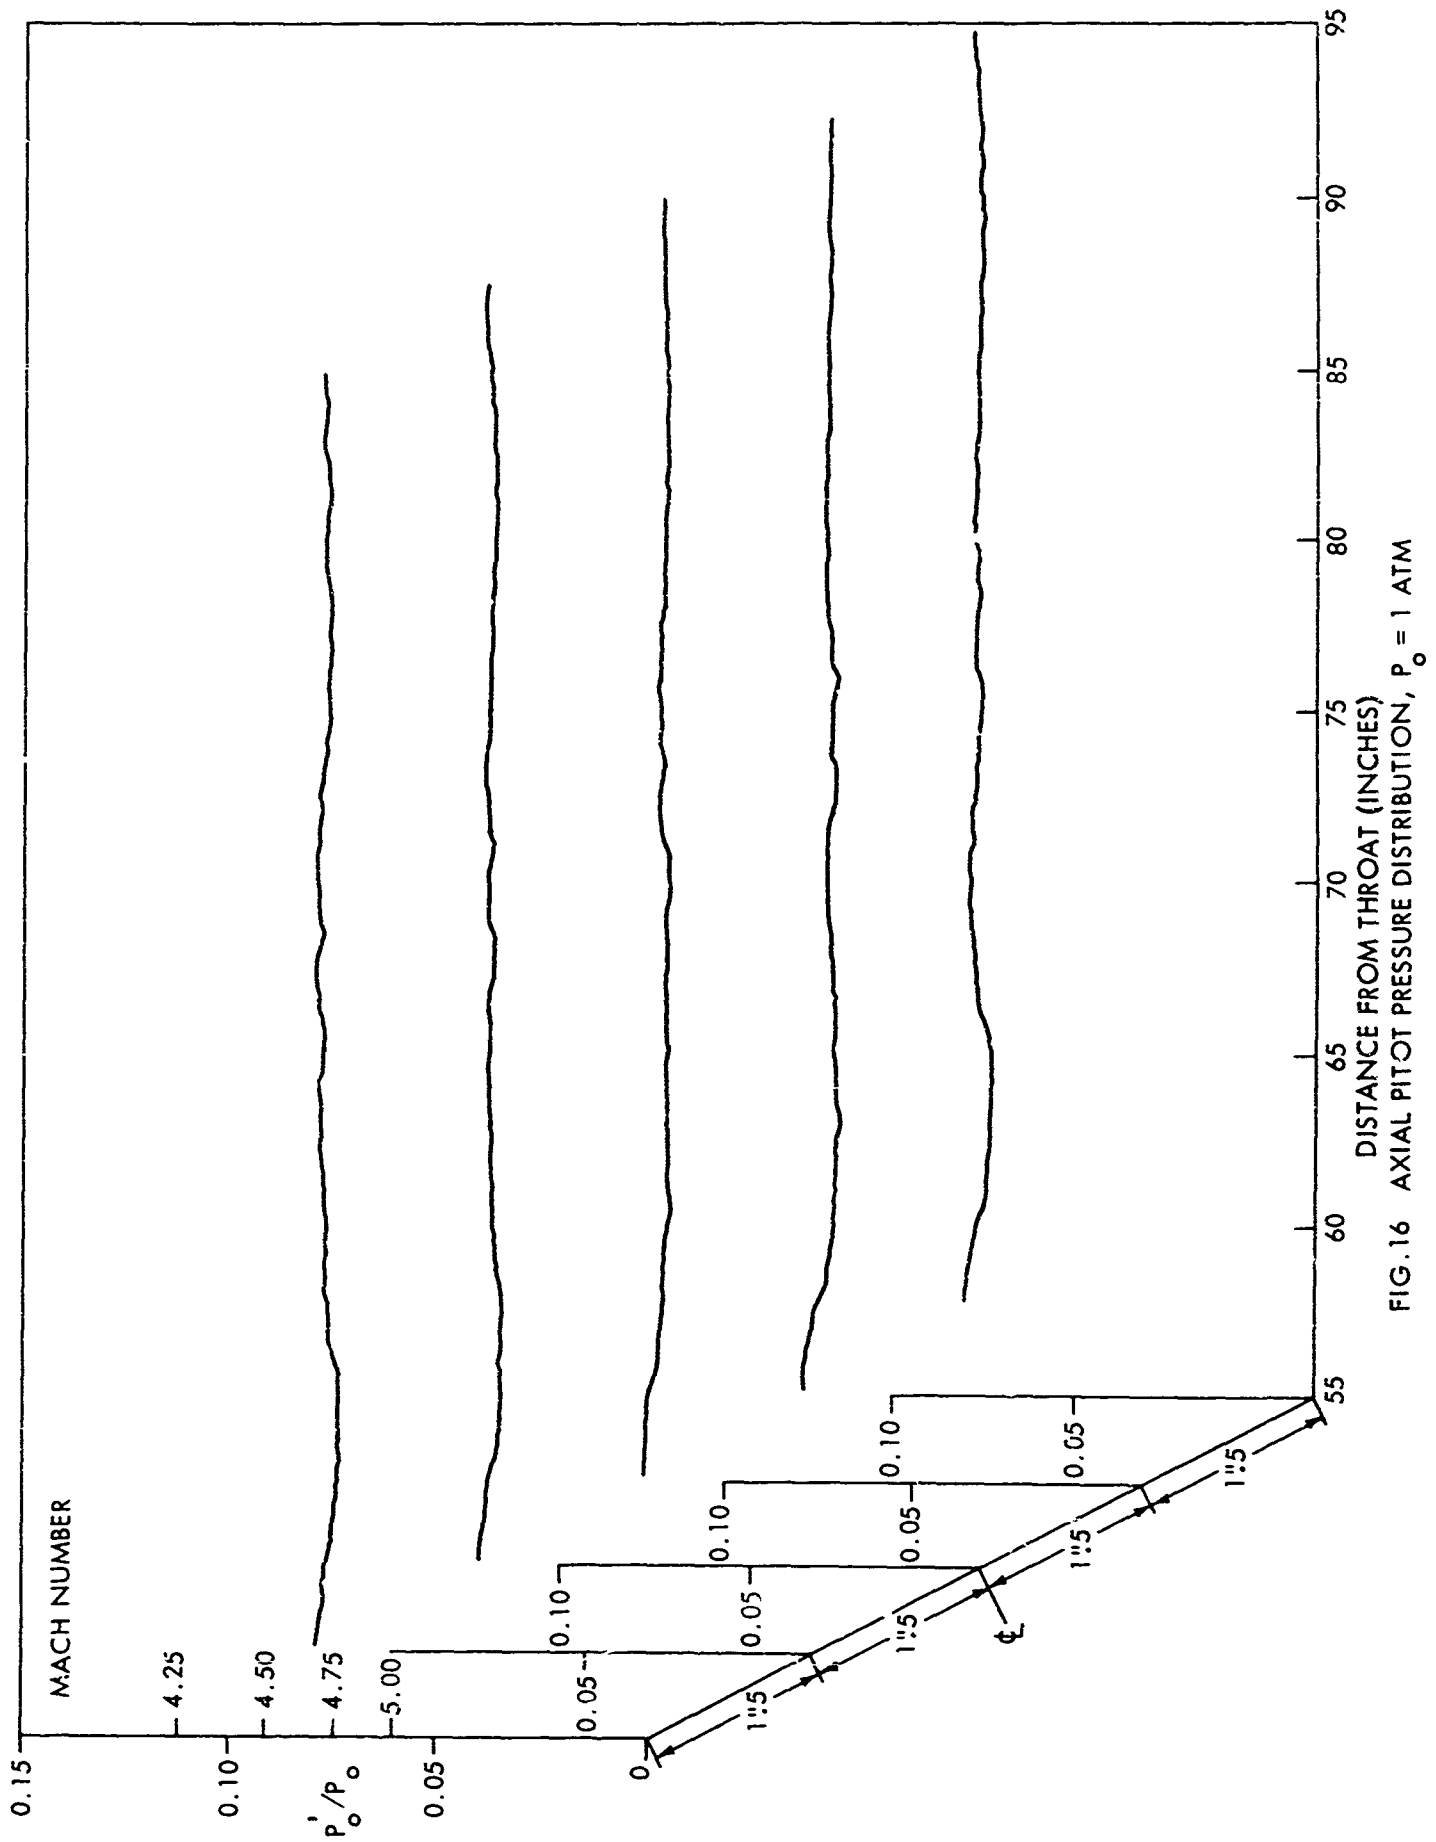
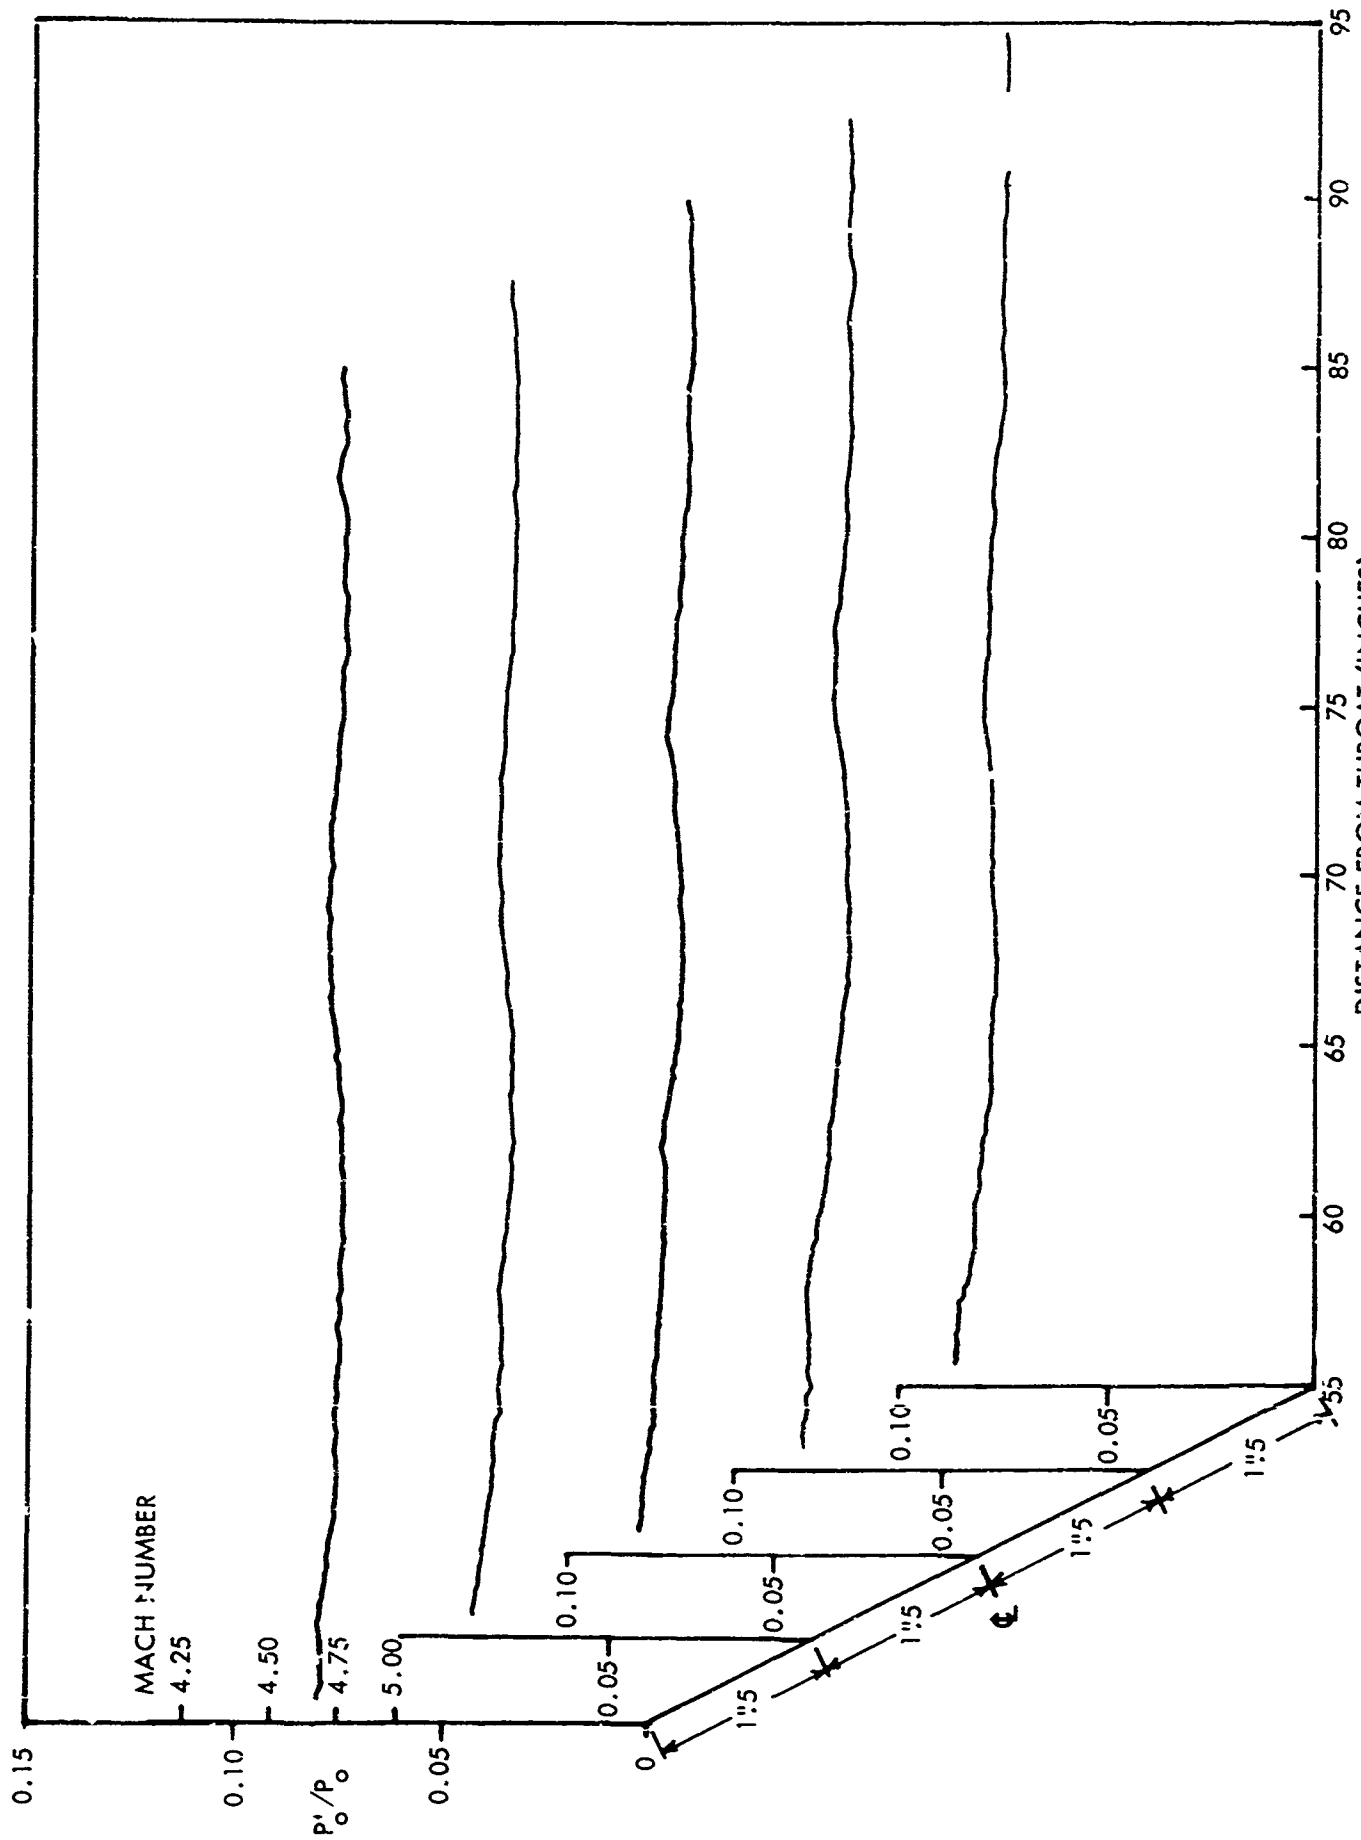FIG.16  AXIAL PITOT PRESSURE DISTRIBUTION, $P_o = 1$ ATM

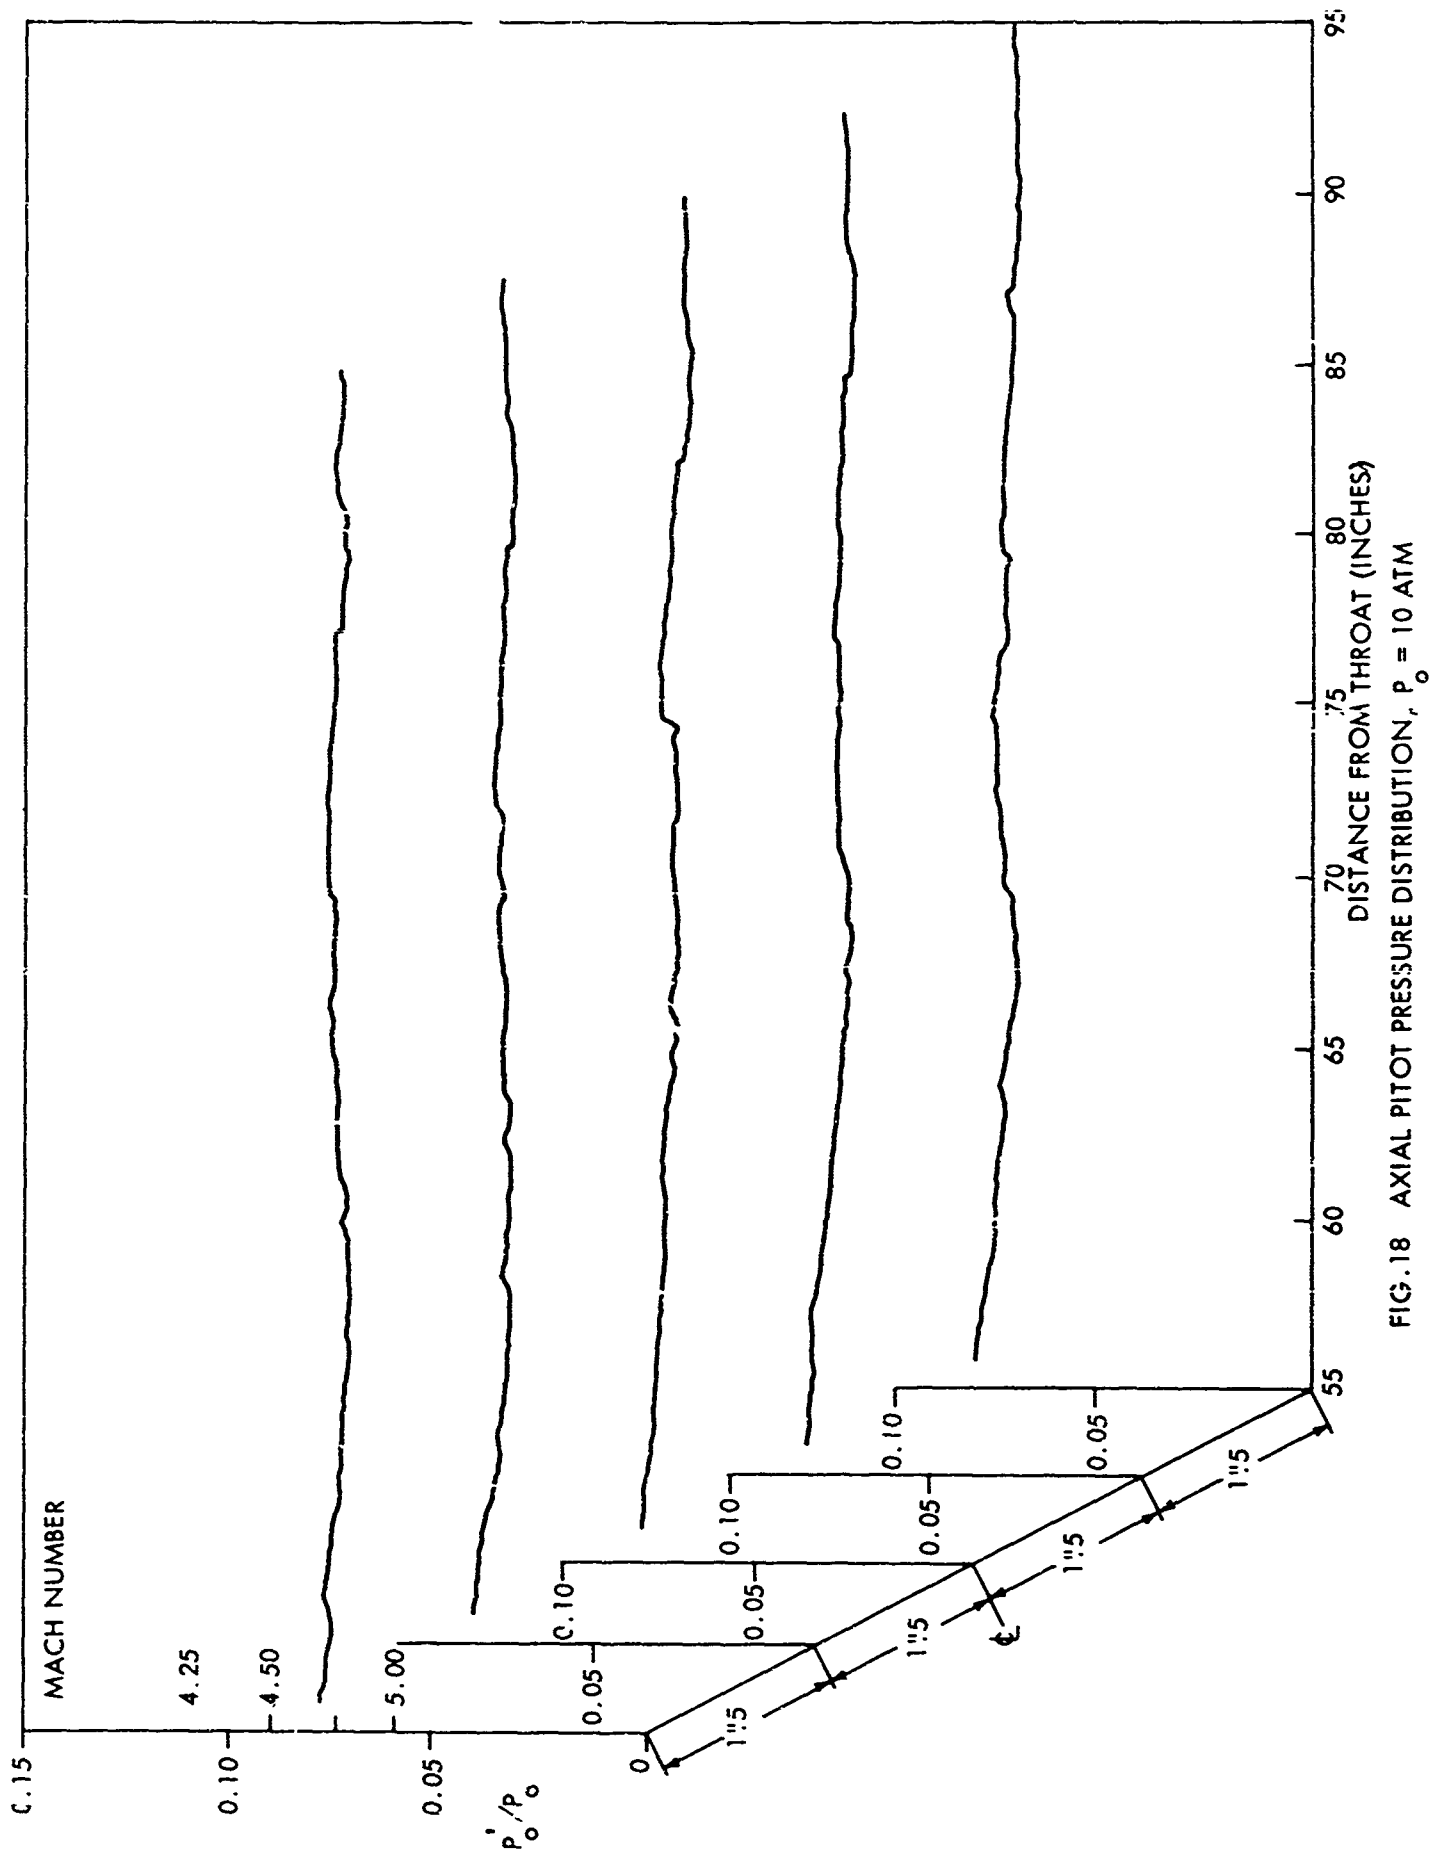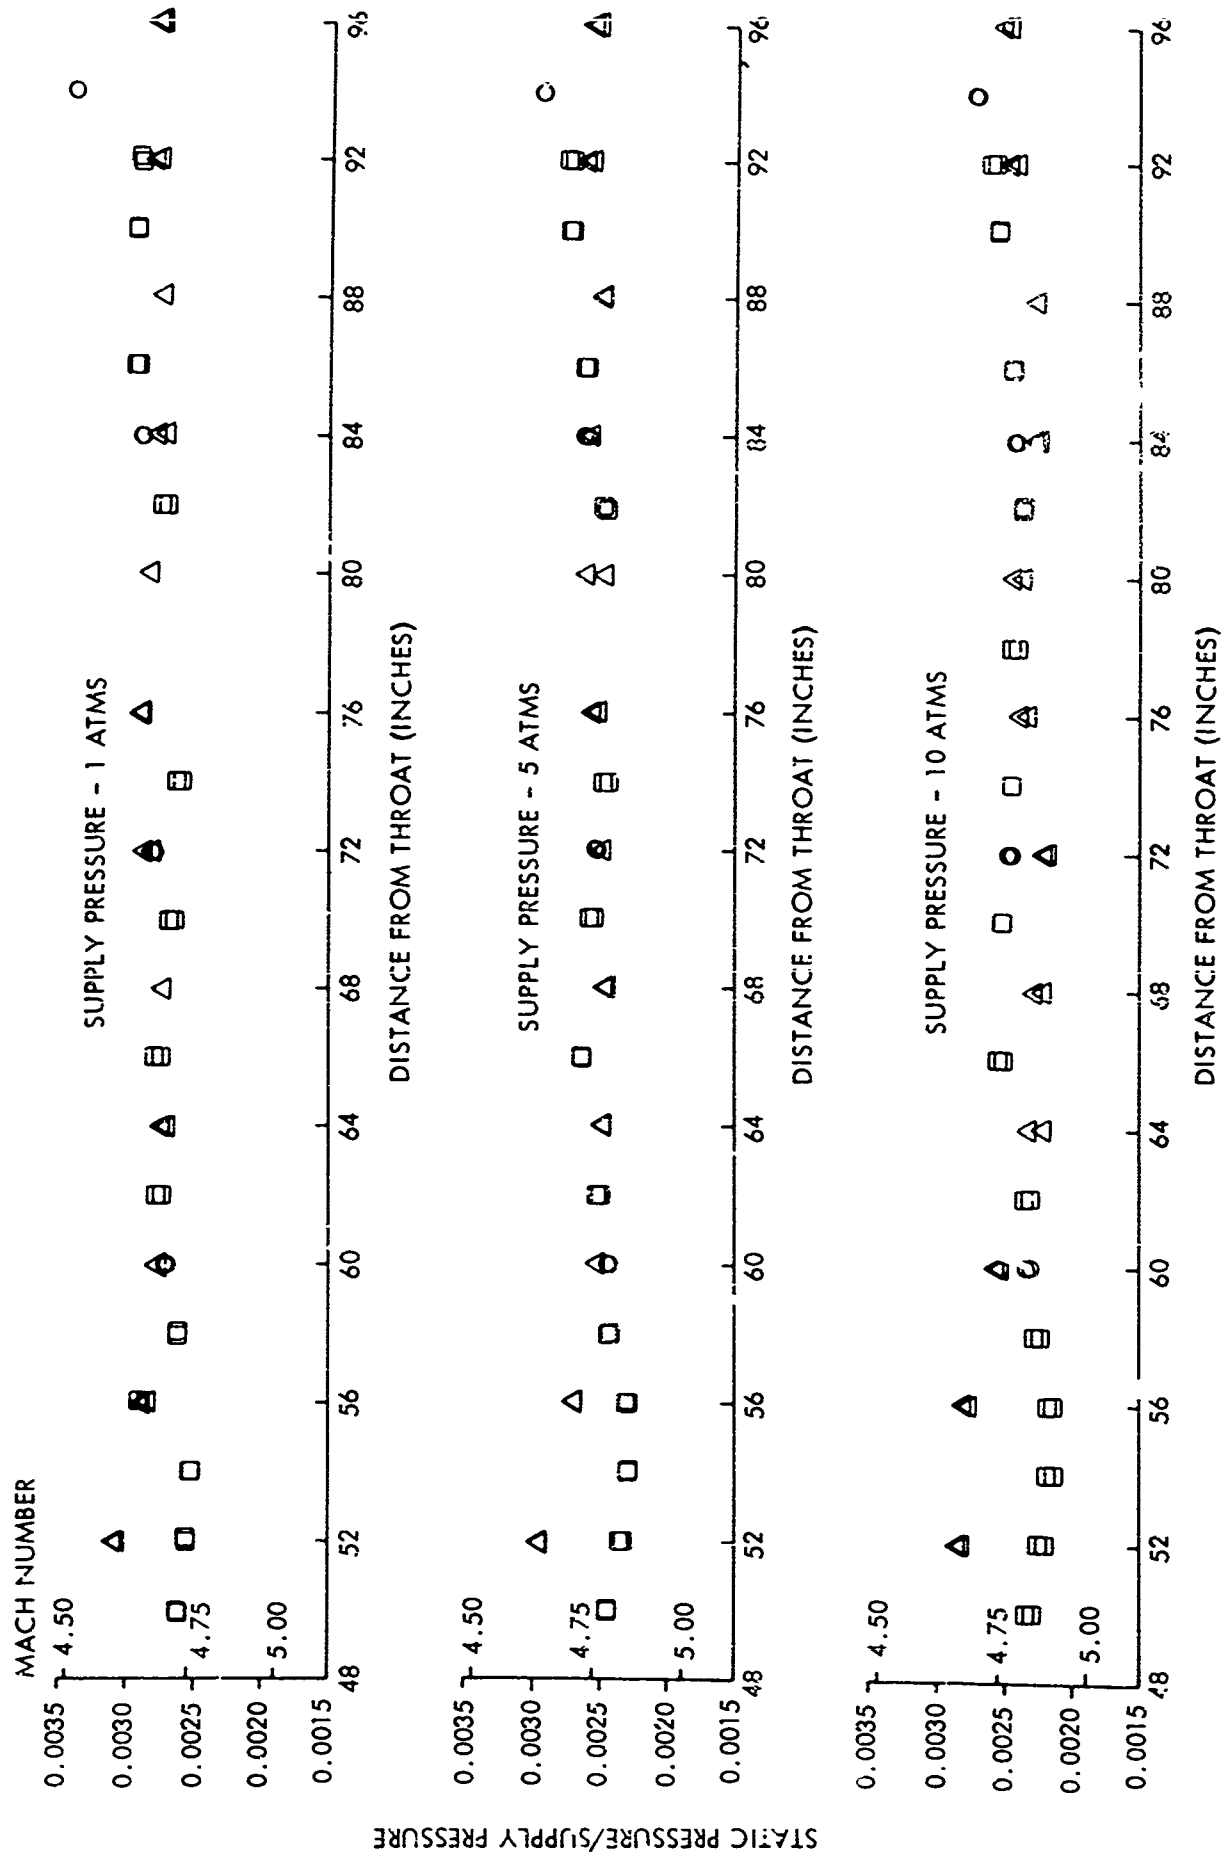FIG.17 AXIAL PITOT PRESSURE DISTRIBUTION. $P_o = 5$ ATM

FIG. 18  AXIAL PITOT PRESSURE DISTRIBUTION, $P_o$ = 10 ATM

FIG.19  AXIAL STATIC PRESSURE DISTRIBUTION

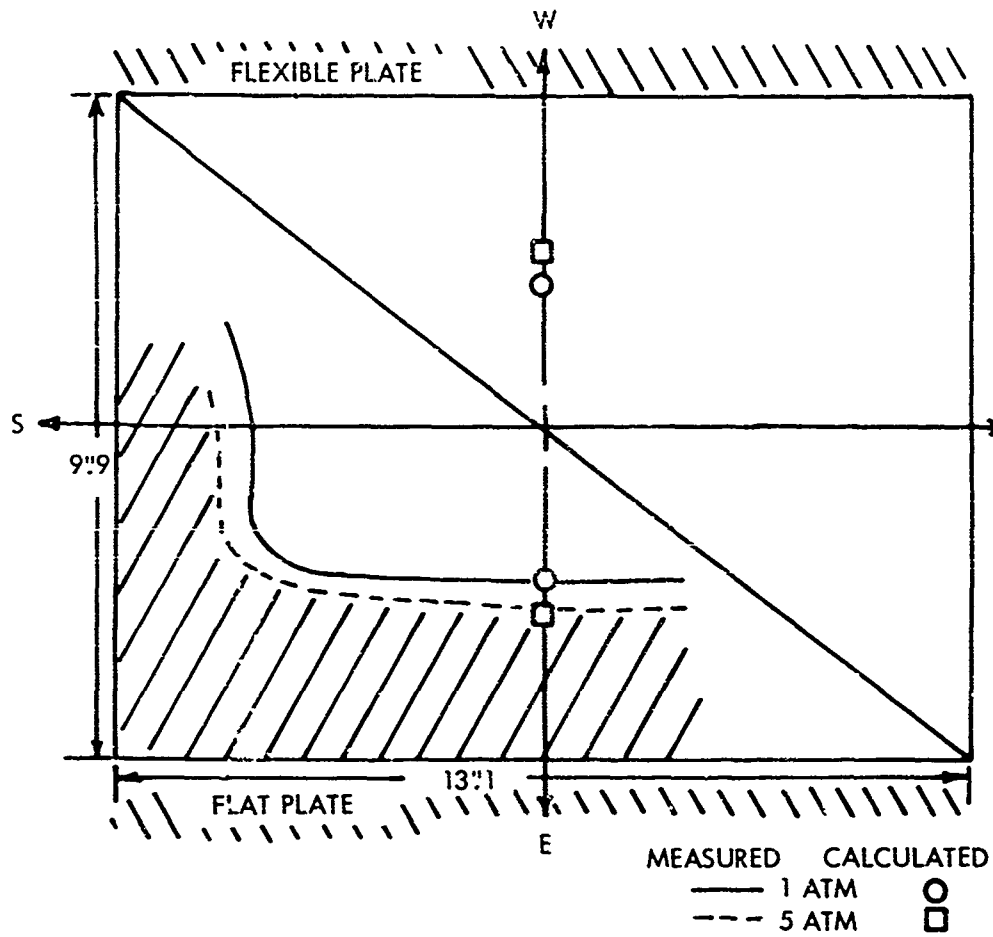△ SOUTH SIDE WALL, 3.56 INCHES ABOVE FLAT PLATE   O FLAT PLATE CENTERLINE   ☐ FLAT PLATE, 2.5 INCHES FROM CENTERLINE

FIG.20 NOZZLE CROSS-SECTION SHOWING BOUNDARY LAYER FLOW
DISTRIBUTION, MACH 5, X = 90"
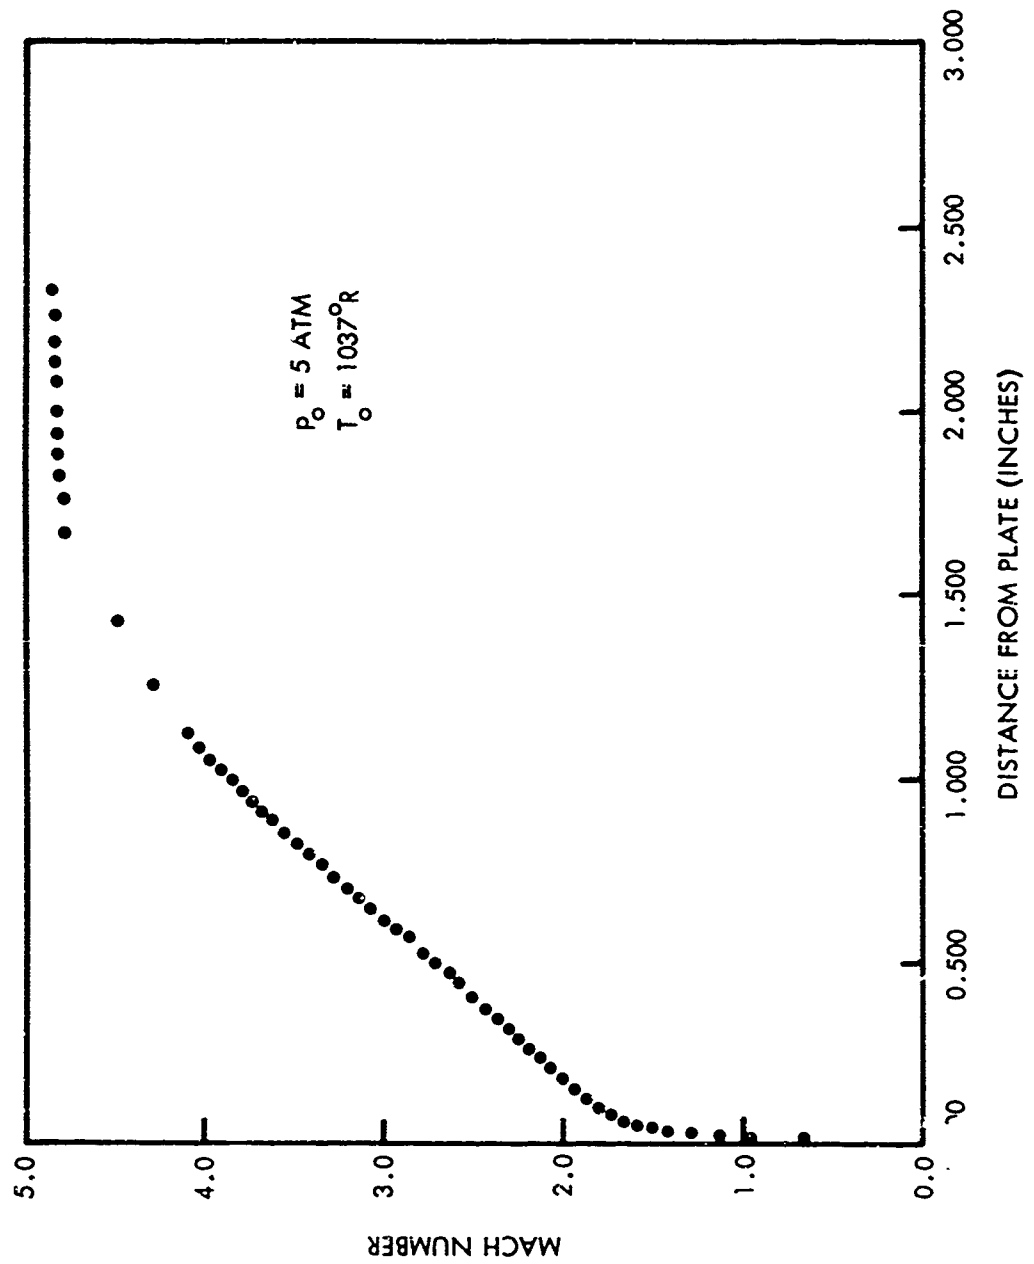
FIG. 21 EXPERIMENTAL MACH NUMBER BOUNDARY LAYER PROFILE, X = 70"
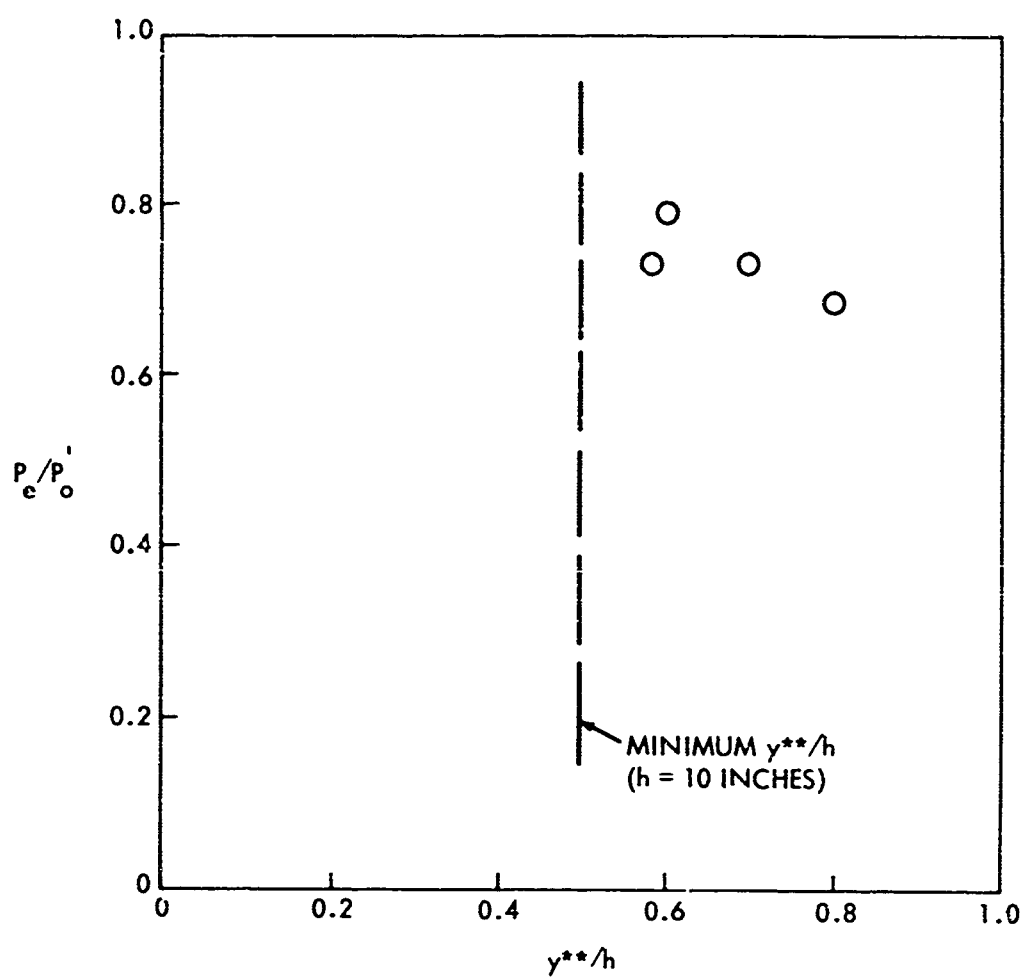
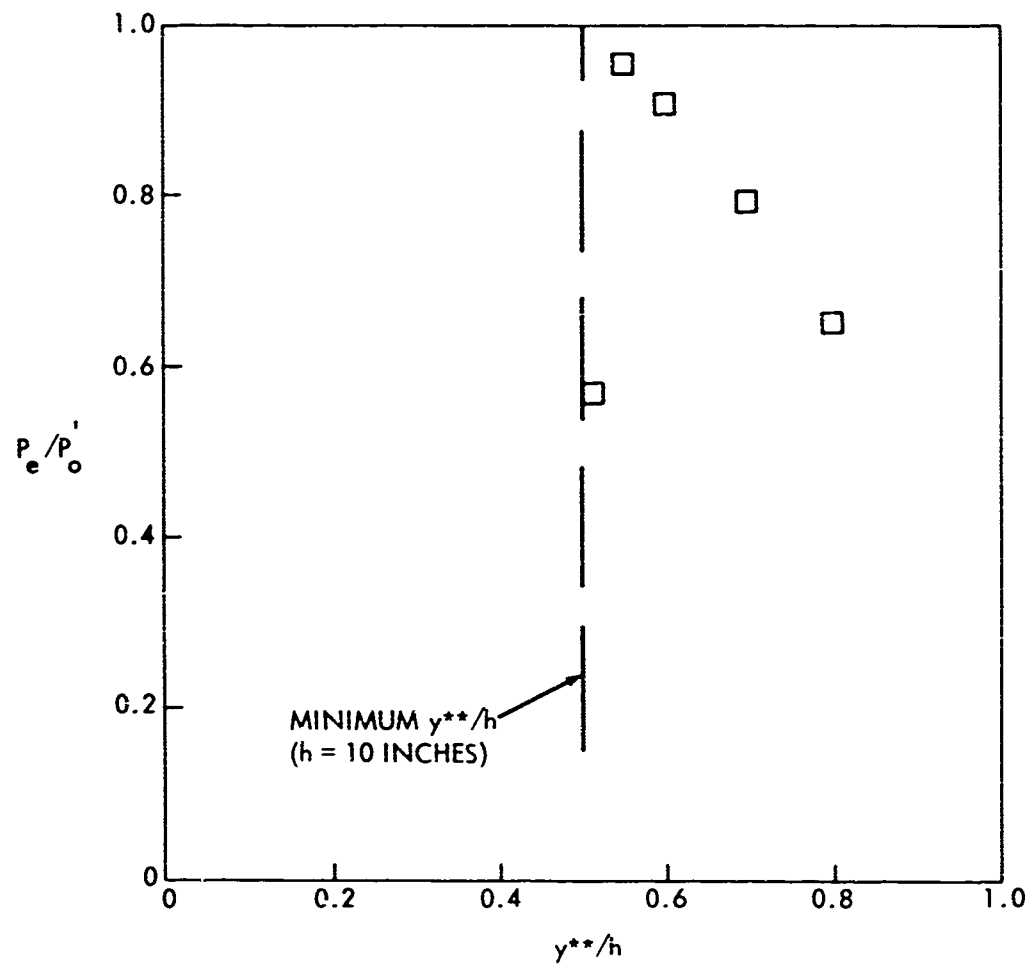FIG.22  BOUNDARY LAYER CHANNEL DIFFUSER RECOVERY PRESSURE, $P_o$ = 1 ATM

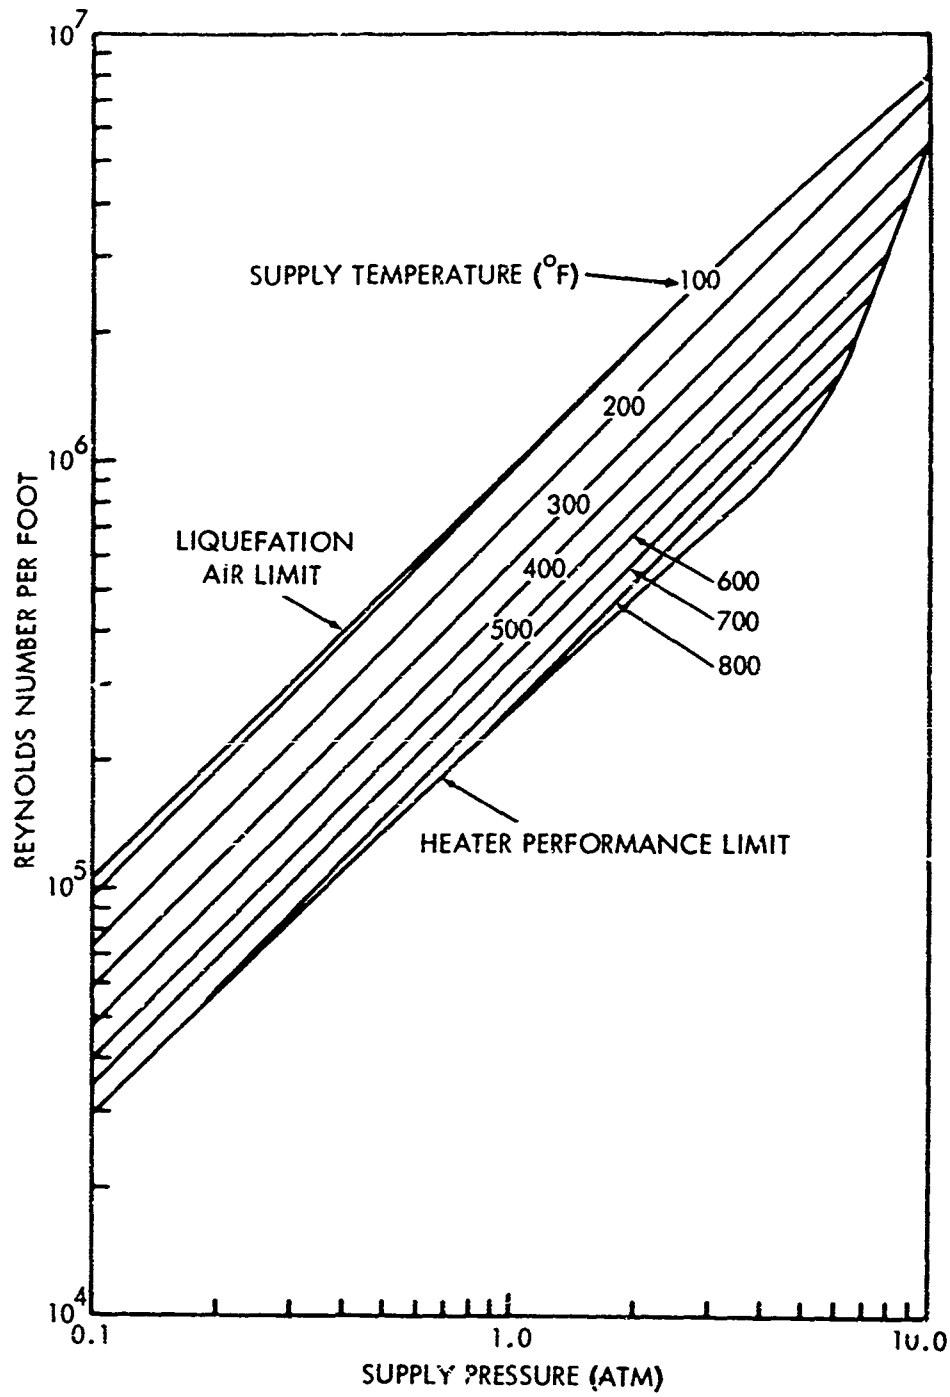FIG.23  BOUNDARY LAYER CHANNEL DIFFUSER RECOVERY PRESSURE, $P_o$ = 4 ATM
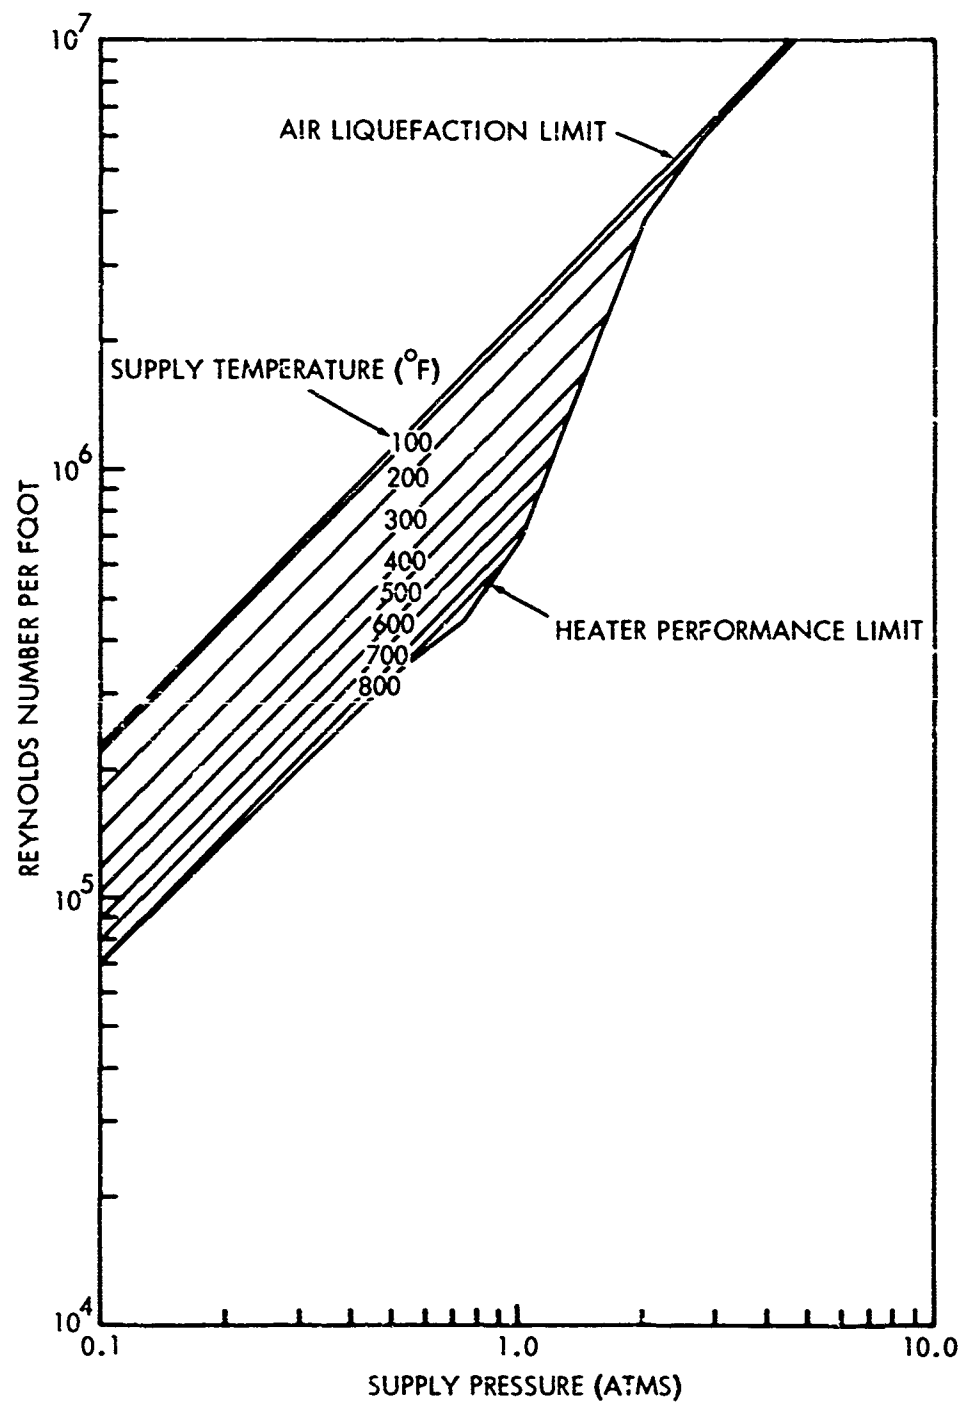
FIG.24 REYNOLDS NUMBER PER FOOT CAPABILITY, MACH 5

FIG.25   REYNOLDS NUMBER PER FOOT CAPABILITY, MACH 3
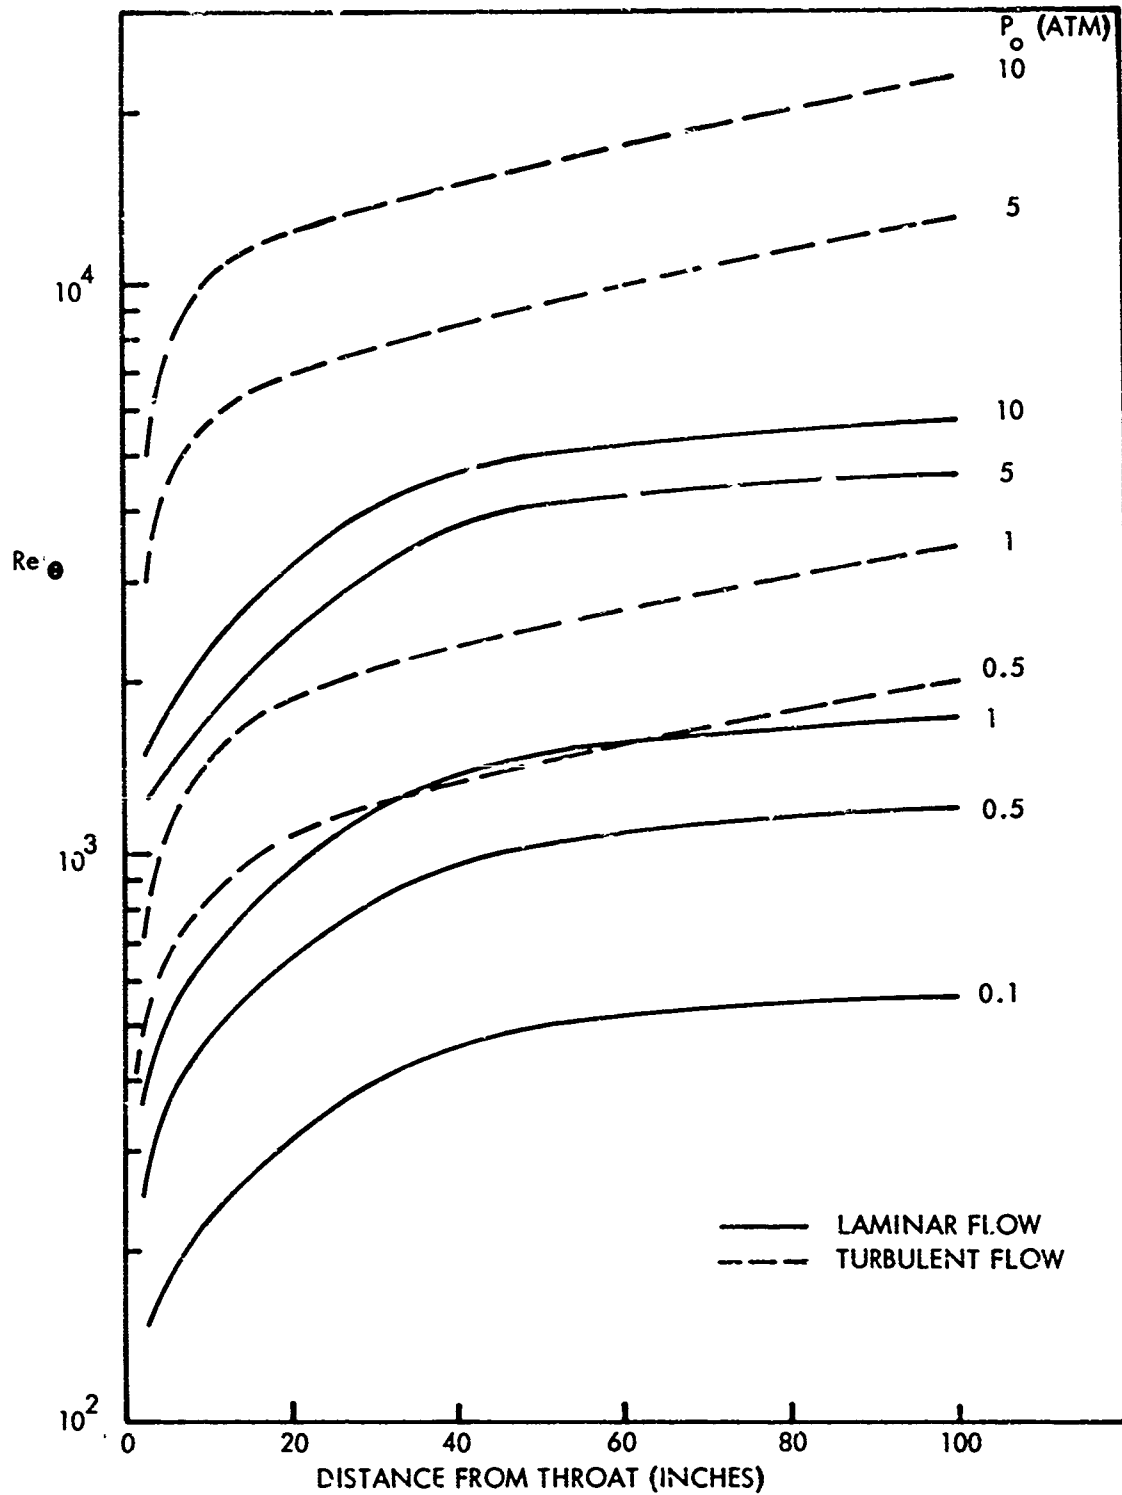
FIG.26  CALCULATED MOMENTUM THICKNESS REYNOLDS NUMBER MACH 5

The channel consists of a variable contour, supersonic, half nozzle using a flexible plate and a system of jacks to prescribe the contour. The working model is a flat plate located on the opposite wall to that of the flexible plate. Instrumentation includes temperature probes, pressure probes, hot wire probes, and a direct skin friction balance.

The channel can be operated at Mach numbers from 3 to 7; supply temperatures up to 1000°F; and supply pressures from 0.1 to 10 atmospheres. Entrance funnels and throat sections have been fabricated for nozzles having nominal exit Mach numbers of 3 and 5. At the present time the channel has only been operated in the Mach 5 mode. The Reynolds number per foot capability at Mach 3 is $10^5$ to $2.4 \times 10^7$ and at Mach 5 is $3 \times 10^4$ to $8 \times 10^5$.

# REFERENCES

(1) Danberg, J. E., Schroth, R. T., Jackson, A. P., and Brown, F. W., "NOL Hypersonic Tunnel No. 4," NOLTR 62-57, 29 Jun 1964

(2) Baum, G. E., Brewbaker, W. E., and Platnick, A. E., "Centrifugal Compressor System for the Continuous Supersonic Wind Tunnel," NAVORD Report 2773, Feb 1953

(3) Squires, K., Roberts, R., Fisher, E., "A Method for Designing Supersonic Nozzles Using the Centerline Mach Number Distribution," NAVORD Report 3995, Oct 1956

(4) Persh, J., and Lee, R., "A Method for Calculating Turbulent Boundary Layer Development in Supersonic and Hypersonic Nozzles Including the Effects of Heat Transfer," NAVORD Report 4200, 7 Jun 1956

(5) Thickstun, W. R., Schroth, R., and Lee, R., "The Development of an Axisymmetric Nozzle for Mach 8," NAVORD Report 5904, NPG Report 1599, Vol. 1, Paper 34, May 1958

(6) Cohen, C. B., and Reshotko, G., "The Compressible Laminar Boundary Layer with Heat Transfer and Arbitrary Pressure Gradient," NACA TR 1294, 1956

(7) Persh, J., "A Procedure for Calculating the Boundary-Layer Development in the Region of Transition from Laminar to Turbulent Flow," NAVORD Report 4438, Mar 1957

(8) Danberg, J. E., "The Equilibrium Temperature Probe, a Device for Measuring Temperatures in a Hypersonic Boundary Layer," NOLTR 61-2, Dec 1961

(9) Kendall, J. M., "Portable Automatic Data Recording Equipment (PADRE)," NAVORD Report 4207, Aug 1959

(10) Mathing, F. W., et al, "Turbulent Skin Friction at High Mach Numbers and Reynolds Numbers in Air and Helium," NASA TR R-82, 1961

(11) Durgin, F. H., "The Design and Preliminary Testing of a Direct Measuring Skin Friction Meter for use in the Presence of Heat Transfer," MIT Technical Report 93, Jun 1964

(12) Risher, D. B., "The NOL Skin Friction Balance," to be published as a NOLTR

(13) Winkler, E. M., "NOL Hypersonic Tunnel No. 4 Results IV: High Supply Temperature Measurement and Control," NAVORD Report 2574, Oct 1952

## DOCUMENT CONTROL DATA - R&D

*(Security classification of title body of abstract and indexing annotation must be entered when the overall report is classified)*

| 1 ORIGINATING ACTIVITY (Corporate author) | 2a REPORT SECURITY CLASSIFICATION |
|---|---|
| U. S. Naval Ordnance Laboratory | UNCLASSIFIED |
| White Oak, Silver Spring, Maryland | 2b GROUP |

3 REPORT TITLE

THE NOL BOUNDARY LAYER CHANNEL

4 DESCRIPTIVE NOTES (Type of report and inclusive dates)

FINAL

5 AUTHOR(S) (Last name, first name, initial)

Lee, Roland E.      Leonas, Annette, C.
Yanta, William J.   Carner, John W.

| 6 REPORT DATE | 7a TOTAL NO OF PAGES | 7b NO OF REFS |
|---|---|---|
| 7 November 1966 | 39 | 13 |

| 8a CONTRACT OR GRANT NO | 9a ORIGINATOR'S REPORT NUMBER(S) |
|---|---|
| b. PROJECT NO | NOLTR 66-185 |
| c | 9b OTHER REPORT NO(S) (Any other numbers that may be assigned this report) |
| d | Aerodynamics research report 66-185 |

10 AVAILABILITY/LIMITATION NOTICES

"Distribution of this document is unlimited."

| 11 SUPPLEMENTARY NOTES | 12 SPONSORING MILITARY ACTIVITY |
|---|---|

13 ABSTRACT

A Mach 3 to 7 blow-down wind tunnel facility for investigating boundary layer phenomena in the transitional and turbulent range is described. The facility, referred to as the Boundary Layer Channel, utilizes a flexible plate and a flat plate to form the two opposite walls of a two-dimensional supersonic nozzle. The plate is 8 feet long. The channel operates at supply temperatures up to $1000°F$ and supply pressures from 0.1 to 10 atmospheres. The Reynolds number per foot capability is from $3 \times 10^4$ to $2.4 \times 10^7$.

DD FORM JAN 64 1473

| 14 KEY WORDS | LINK A | | LINK B | | LINK C | |
|---|---|---|---|---|---|---|
| | ROLE | WT | ROLE | WT | ROLE | WT |
| 1. wind tunnels, supersonic | | | | | | |
| 2. wind tunnels, design | | | | | | |
| 3. wind tunnels, boundary layer | | | | | | |

## INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year; or month, year. If more than one, date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

(1) "Qualified requesters may obtain copies of this report from DDC."

(2) "Foreign announcement and dissemination of this report by DDC is not authorized."

(3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through

_____ ."

(4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through

_____ ."

(5) "All distribution of this report is controlled. Qualified DDC users shall request through

_____ ."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS) (S), (C), or (U)

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional